
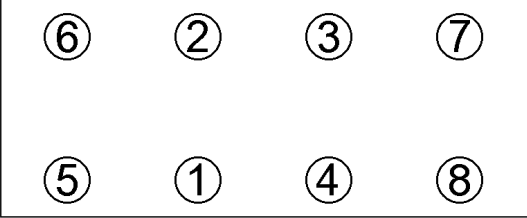


Anziehvorschrift für Zylinderkopf		004.441 passend für / suitable for adaptable à / adaptable a Renault	 Das Original	
Tightening Instructions for Cylinder Head				
Instructions de serrage pour culasse				
Prescripciones de apriete para culatas				
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete		
 649.400 M10x1,5x123				
Anziehen/ * 25 Nm Tightening/ 25 Nm Serrage/ ➤ 270° ±20° Apriete				
Zeichenerklärung / Explanations / Explication / Explicacion				
* ➤	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
☐	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor ⚙ 0,72 mm, Ø 73,7 mm Mot.: H4B, H4D, HR09DET, M 281.910/920 Renault Captur, Clio IV, Twingo III, Thalia II Dacia Sandero, Logan II, Nissan Micra Smart Fortwo, Forfour				
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601		*004.441*		