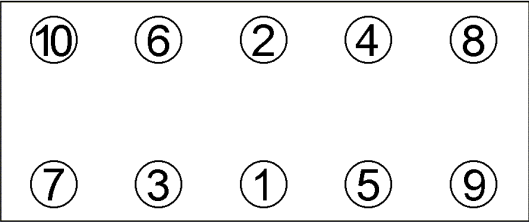


Anziehvorschrift für Zylinderkopf		008.822 passend für / suitable for adaptable à / adaptable a Alfa Romeo / Fiat	 Das Original
Tightening Instructions for Cylinder Head			
Instructions de serrage pour culasse			
Prescripciones de apriete para culatas			

Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo  374.270 M12X1,25X224	Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete 
--	--

Anziehen/	✱	62 - 68 Nm
Tightening/	➤	90°
Serrage/	➤	90°
Apriete	➤	90°

Zeichenerklärung / Explanations / Explication / Explicacion

✱	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
☐	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

✚ 0,92 mm, Ø 83 mm, 1 Loch/hole/trou/agujero

Mot.: 937A5.000, 939A2.000, 937A8.000,
937A4.000, 192B1.000, 192A5.000

1,9 Ltr. Diesel JTD 16 V
Stilo, GT, Croma, 147, 159

ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601	*008.822*
--	------------------