
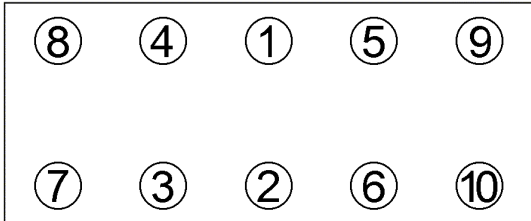


Anziehvorschrift für Zylinderkopf		018.771 passend für / suitable for adaptable à / adaptable a Kia	 Das Original	
Tightening Instructions for Cylinder Head				
Instructions de serrage pour culasse				
Prescripciones de apriete para culatas				
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete		
				
707.680 M 12 x 113 x1,5				
Anziehen/ Tightening/ Serrage/ Apriete	* 30 Nm ➤ 90°-105° ➤ 90°-105°			
Zeichenerklärung / Explanations / Explication / Explicacion				
✱	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
□	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor ✱ 1,40 mm, Ø 87,5 mm Mot.: R2, RF, RF1FG, RF-CX, RF-N 2,0 ltr.-2,2 ltr. 44-64 kW (60-87 PS) Retona, Sportage, 323, 626 III-IV, E 2000/2200 Grand Vitara, Vitara				
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601		*018.771*		