

Anziehvorschrift für Zylinderkopf		058.671 passend für / suitable for adaptable à / adaptable a PSA	 Das Original
Tightening Instructions for Cylinder Head			
Instructions de serrage pour culasse			
Prescripciones de apriete para culatas			

Schraubenkopf / Head shape
 Tête de vis / Cabeza de tornillo


Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete

A



B



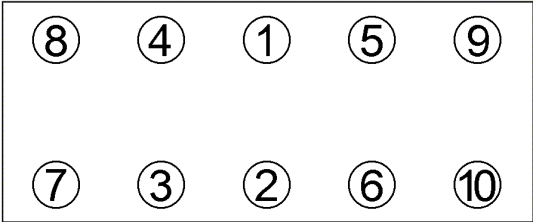

152.550
 M 12x1,5x123

Anziehen/ Tightening/ Serrage/ Apriete	A * 30 Nm 70 Nm ➤ 120°	B * 20 Nm 60 Nm ➤ 90° ➤ 90°
---	--	--

Zeichenerklärung / Explanations / Explication / Explicacion

Motortyp / Engine type / Type de moteur / Tipo de motor
 ✱ 1,4 mm, Ø 82 mm, 2 Kerben/notches/encoches/muescas

 Mot.: XUD7, 161, 161A, A9A
 1,7-1,8 ltr. Diesel, 43-44 kW (58-60 PS)

 Berlingo, BX, C15, Visa, Xsara, ZX
 205, 306, 309, Partner