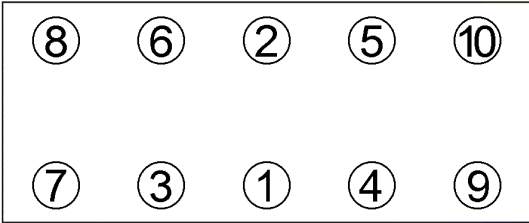


Anziehvorschrift für Zylinderkopf		144.000 passend für / suitable for adaptable à / adaptable a Alfa Romeo/Fiat/Lancia	 Das Original	
Tightening Instructions for Cylinder Head				
Instructions de serrage pour culasse				
Prescripciones de apriete para culatas				
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete		
				
760.900 M 10 x 115				
Anziehen/ Tightening/ Serrage/ Apriete	* 40 Nm ➤ 90° ➤ 90°			
Zeichenerklärung / Explanations / Explication / Explicacion				
✱	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
□	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor				
✱ 1,74/1,65 mm, Ø 85 mm				
Mot.: 154 A1.000, 154 C3.000, 159 A4.000, 175 A1.000, 831 B4.000, 834 C1.146				
Alfa Romeo 155, 164 Fiat Coupé, Croma, Tempura, Tipo Lancia Dedra, Delta, Kappa, Thema				
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601		*144.000*		