



Anziehvorschrift für Zylinderkopf		167.911	
Tightening Instructions for Cylinder Head		passend für / suitable for	
Instructions de serrage pour culasse		adaptable à / adaptable a	
Prescripciones de apriete para culatas		Chevrolet / Opel	
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Das Original	



257.910
M 11x1,5x162

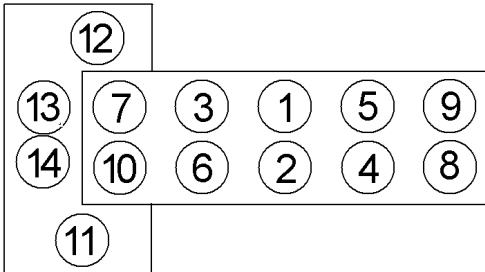

Anziehen/ Tightening/ Serrage/ Apriete	* ➤	M11 15 Nm 30 Nm 155°	M8 35 Nm
---	--------	-------------------------------	-------------

Zeichenerklärung / Explanations / Explication / Explicacion				
✱	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
☐	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

Ø: 89,4 mm; $\frac{1}{4}$: 0,64 mm

Mot: A24XE, LE5

2.4 ltr ECOTEC
105-136 KW (143-185 PS)

Antara, Captiva, Malibu

ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601	*167.911*
--	------------------