
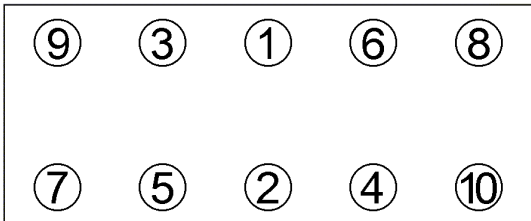


Anziehvorschrift für Zylinderkopf		198.680 passend für / suitable for adaptable à / adaptable a Suzuki	 Das Original
Tightening Instructions for Cylinder Head			
Instructions de serrage pour culasse			
Prescripciones de apriete para culatas			
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete	
			
452.740 M10x1,5x120			
Anziehen/ Tightening/ Serrage/ Apriete	* 20 Nm 40 Nm ➤ 60° ➤ 60°		
Zeichenerklärung / Explanations / Explication / Explicacion			
* ★ ☐ ● ➤	neue Zylinderkopf- schrauben verwenden Warmlauf (80°C) Schrauben einzeln lösen und wieder anziehen Setzzeit Drehwinkel	use new cylinder head bolts warm up time (80°C) loosen and tighten each bolt relaxation time torque angle	utiliser des vis neuves chauffage (80°C) deserrer et serrer vis par vis durée de tassement angle de serrage emplar tornillos nuevos calentamiento (80°C) aflojar y apretar tornillo a tornillo tiempo de espera ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor			
Ø: 79mm; ½: 0,7mm Mot: M13A, M15A, M16A 1,3 ltr.-1,6 ltr. 60-80 kW (82-109 PS) Grand Vitara, Ignis, Jimny, Liana, Swift III, SX Wagon R+, Sedici			
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601		*198.680*	