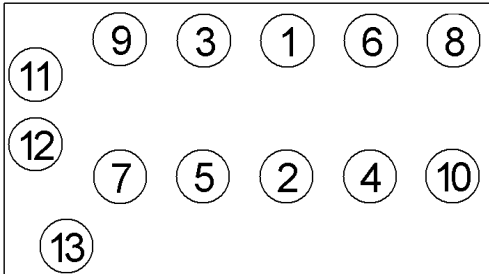


Anziehvorschrift für Zylinderkopf		306.340 passend für / suitable for adaptable à / adaptable a Nissan	 Das Original
Tightening Instructions for Cylinder Head			
Instructions de serrage pour culasse			
Prescripciones de apriete para culatas			
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete	
 373.000 M 10x1,5x115			
Anziehen/ Tightening/ Serrage/ Apriete		1-10: * 62-72 Nm □ 360° 1-13: 22-32 Nm 1-10: ► 90-95 °	
Zeichenerklärung / Explanations / Explication / Explicacion			
* ★ □ ● ►	neue Zylinderkopf- schrauben verwenden Warmlauf (80°C) Schrauben einzeln lösen und wieder anziehen Setzzeit Drehwinkel	use new cylinder head bolts warm up time (80°C) loosen and tighten each bolt relaxation time torque angle	utiliser des vis neuves chauffage (80°C) deserrer et serrer vis par vis durée de tassement angle de serrage emplar tornillos nuevos calentamiento (80°C) aflojar y apretar tornillo a tornillo tiempo de espera ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor Ø73,5 mm; 1/8: 0,60 mm Mot: CR14DE 1,4 ltr. 65 kW (88 PS) Micra III, Mirca C+C 01/03→ Note 01/06→			
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601		*306.340*	