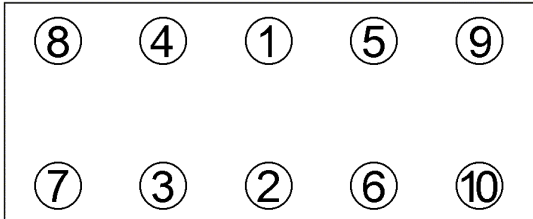


Anziehvorschrift für Zylinderkopf		332.702	
Tightening Instructions for Cylinder Head			
Instructions de serrage pour culasse			
Prescripciones de apriete para culatas			
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		passend für / suitable for adaptable à / adaptable a Renault, Opel, Nissan Das Original	
Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete			
			
373.320 M 12x1,5x131			
Anziehen/ Tightening/ Serrage/ Apriete	* ➤ ➤	30 Nm 30 Nm 150° +/- 3° 150° +/- 3°	
Zeichenerklärung / Explanations / Explication / Explicacion			
* ★ □ ● ➤	neue Zylinderkopf- schrauben verwenden Warmlauf (80°C) Schrauben einzeln lösen und wieder anziehen Setzzeit Drehwinkel	use new cylinder head bolts warm up time (80°C) loosen and tighten each bolt relaxation time torque angle	utiliser des vis neuves chauffage (80°C) deserrer et serrer vis par vis durée de tassement angle de serrage emplar tornillos nuevos calentamiento (80°C) aflojar y apretar tornillo a tornillo tiempo de espera ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor			
Ø: 88 mm; $\frac{1}{4}$: 1,24 mm			
Mot: G9T 702/710/720/722 2,2 ltr. dCi/DTI Diesel			
Espace, Master, Laguna		ab 2000➔	
Vel Satis, Interstar		ab 2002➔	
Movano		ab 2000➔	
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601		*332.702*	