
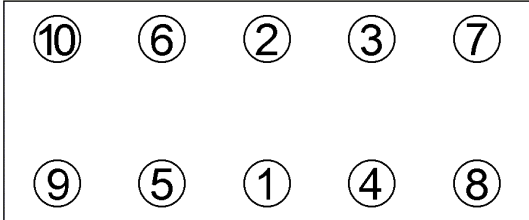


Anziehvorschrift für Zylinderkopf			381.752		 Das Original
Tightening Instructions for Cylinder Head			passend für / suitable for adaptable à / adaptable a		
Instructions de serrage pour culasse			Renault/Nissan		
Prescripciones de apriete para culatas					
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo			Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete		
					
373.320 M 12x1,5x131					
Anziehen/ Tightening/ Serrage/ Apriete	* ➤ ➤	5 Nm 30 Nm 150° 150°			
Zeichenerklärung / Explanations / Explication / Explicacion					
* ★ □ ● ➤	neue Zylinderkopf- schrauben verwenden Warmlauf (80°C) Schrauben einzeln lösen und wieder anziehen Setzzeit Drehwinkel	use new cylinder head bolts warm up time (80°C) loosen and tighten each bolt relaxation time torque angle	utiliser des vis neuves chauffage (80°C) deserrer et serrer vis par vis durée de tassement angle de serrage	emplar tornillos nuevos calentamiento (80°C) aflojar y apretar tornillo a tornillo tiempo de espera ángulo de giro	
Motortyp / Engine type / Type de moteur / Tipo de motor					
✚ 1,2 mm, Ø 84,85 mm					
Mot.: M9Ra 2,0 Ltr. dCi Diesel 66-110 kW (90-150 PS)					
Laguna II, Scénic II, Mégane II ab 2005➔ Espace IV, Trafic ab 2006➔ Vivaro ab 2006➔					
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601			*381.752*		