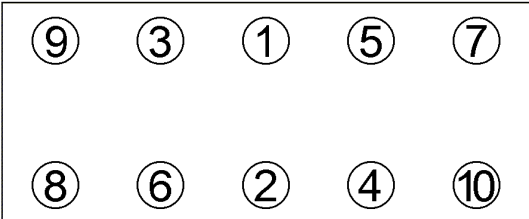


Anziehvorschrift für Zylinderkopf		492.252		
Tightening Instructions for Cylinder Head				
Instructions de serrage pour culasse				
Prescripciones de apriete para culatas				
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		passend für / suitable for adaptable à / adaptable a		
		Alfa Romeo, Lancia		
		Das Original		
				
703.370 M10 x 1,25 x 250				
Anziehen/ Tightening/ Serrage/ Apriete	* ➤ ➤ ➤	20 Nm 40 Nm 90° 90° 90°		
Zeichenerklärung / Explanations / Explication / Explicacion				
*	neue Zylinderkopf- schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
☐	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor				
Ø: 83,7 mm; $\frac{1}{4}$: 0,64 mm				
Mot: 939.B1.000, 940.A1.000				
1,8 ltr. TB				
147-173 kW (200-235 PS)				
Nuovo Delta III 159, Brera, Giulietta, Nuovo Spider				
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601			*492.252*	