



Anziehvorschrift für Zylinderkopf		527.740	 Das Original
Tightening Instructions for Cylinder Head		passend für / suitable for adaptable à / adaptable a Nissan / Renault	
Instructions de serrage pour culasse			
Prescripciones de apriete para culatas			
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete	



267.660
M 11x1,25x123

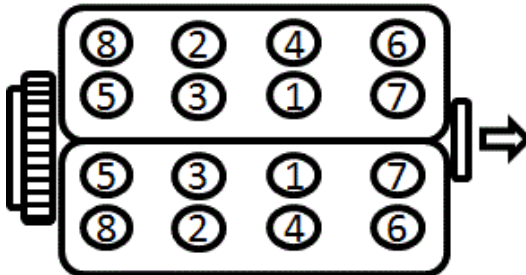

Anziehen/ Tightening/ Serrage/ Apriete	*	52 Nm
		105 Nm
	□	360°
		40 Nm
	➤	95°
	➤	95°

Zeichenerklärung / Explanations / Explication / Explicacion

*	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
□	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

3500ccm³ 175-230KW
Rechts/Right
Mot: VQ35HR / V4Y 713

Nissan: 350Z (Z35)
Renault: Laguna Coupe
Laguna III

ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601	*527.740*
--	-----------