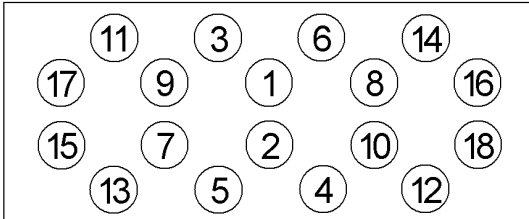


Anziehvorschrift für Zylinderkopf		549.250	 Das Original																		
Tightening Instructions for Cylinder Head		passend für / suitable for adaptable à / adaptable a Nissan																			
Instructions de serrage pour culasse																					
Prescripciones de apriete para culatas																					
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete																			
																					
<table><tr><td>Anziehen/</td><td>✱</td><td>39 Nm</td></tr><tr><td>Tightening/</td><td>➤</td><td>180°</td></tr><tr><td>Serrage/</td><td>□</td><td>360°</td></tr><tr><td>Apriete</td><td></td><td>39 Nm</td></tr><tr><td></td><td>➤</td><td>90°</td></tr><tr><td></td><td>➤</td><td>90°</td></tr></table>				Anziehen/	✱	39 Nm	Tightening/	➤	180°	Serrage/	□	360°	Apriete		39 Nm		➤	90°		➤	90°
Anziehen/	✱	39 Nm																			
Tightening/	➤	180°																			
Serrage/	□	360°																			
Apriete		39 Nm																			
	➤	90°																			
	➤	90°																			
Zeichenerklärung / Explanations / Explication / Explicacion																					
✱	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos																	
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)																	
□	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo																	
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera																	
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro																	
Motortyp / Engine type / Type de moteur / Tipo de motor																					
Ø: 89,50 mm; ✱: 0,925 mm																					
Mot: YD25DDTi																					
2,5 ltr.																					
140 kW (190 PS)																					
Navara, Pathfinder ab 01/2010➔																					
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601			*549.250*																		