
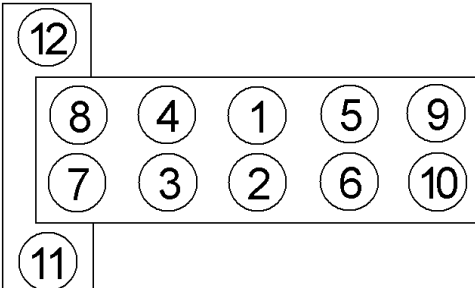


Anziehvorschrift für Zylinderkopf		572.500 passend für / suitable for adaptable à / adaptable a Opel	 Das Original	
Tightening Instructions for Cylinder Head				
Instructions de serrage pour culasse				
Prescripciones de apriete para culatas				
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete		
 125.930 M 8x1,25x119				
Anziehen/ ➤ Pos. 1-12: 25 Nm Tightening/ ✱ Pos. 1-12: 60° Serrage/ ✱ Pos. 1-12: 60° Apriete ✱ Pos. 1-12: 60°				
Zeichenerklärung / Explanations / Explication / Explicacion				
✱	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
☐	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor				
Ø: 73,9 mm; $\frac{1}{2}$: 0,57 mm				
Mot: Z12XEP; Z14XEP 1.2-1.4 ltr. (55-66 kW 75-90 PS)				
Opel Agila A, Astra G, Astra H, Combo Cors C, Corsa D, Meriva A Suzuki Wagon R				
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601			*572.500*	