
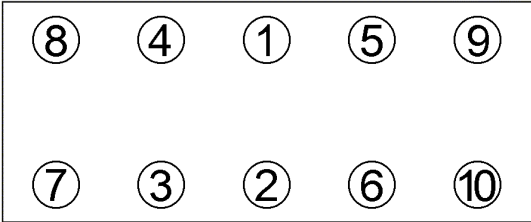


Anziehvorschrift für Zylinderkopf		984.259 passend für / suitable for adaptable à / adaptable a Renault	 Das Original	
Tightening Instructions for Cylinder Head				
Instructions de serrage pour culasse				
Prescripciones de apriete para culatas				
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete		
				
759.180 M 12 x 113				
Anziehen/ Tightening/ Serrage/ Apriete	* 30 Nm ➤ 80°±4° ● 3 min □ ösen/loosen desserrer/aflojar ➤ 25 Nm + 213°±7°			
Zeichenerklärung / Explanations / Explication / Explicacion				
✱	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
□	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor				
Ø: 81 mm; ￼: 1,65 mm; 2 Löcher/Holes/Trous				
Mot: F8Q 610,620,624,640,682,706,710,714 722,724,730,732,742,764,774,776				
1,9 Ltr. D; 44-48 kW (60-65 PS)				
R19, Clio, Megane, Rapid				
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601			*984.259*	