


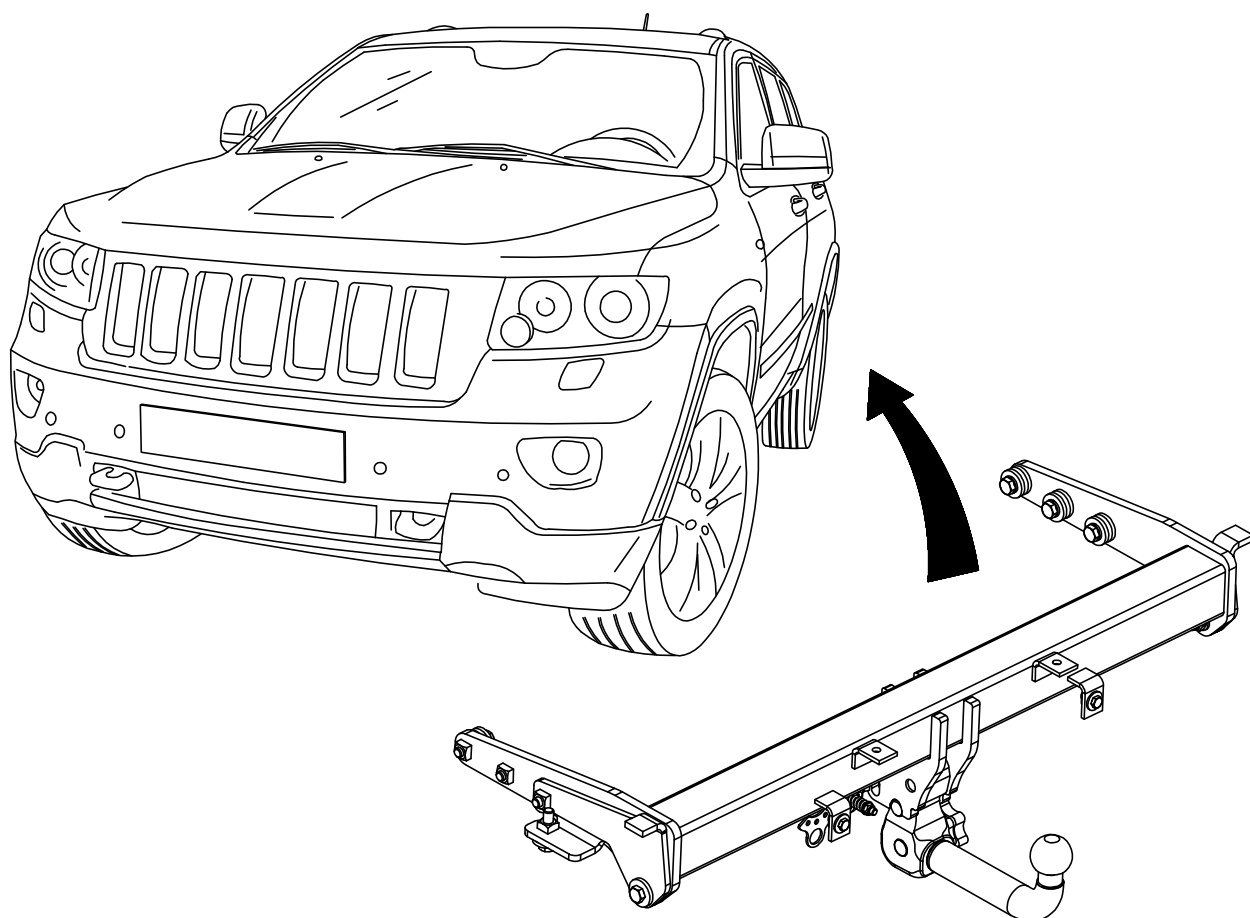

MVG: 0845 A

Jeep Grand Cherokee + SRT (WK)

(E) Instrucciones de montaje

(D) Einbauanleitung

(GB) Installation instruction

(F) Notice de montage

(NL) Inbouw instructie

(S) Monteringsanvisning



(CZ) Návod k montáži

(I) Istruzioni di montaggio


An der Wasserwiese 1
D-52249 Eschweiler

E-mail: info@mvg-ahk.de
Internet: www.mvg-ahk.de


Tel.: 0049 (0)2403/7902-60
Fax: 0049 (0)2403/7902-99

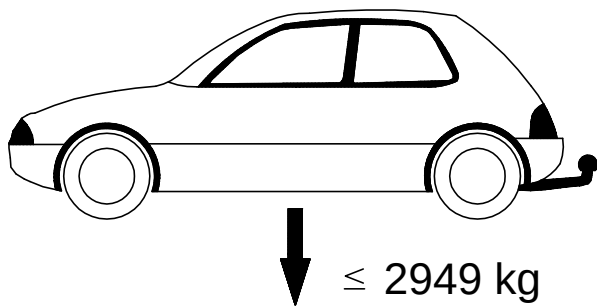

EG
e4*2007/46*0186



$$D = 15,8 \text{ kN}$$

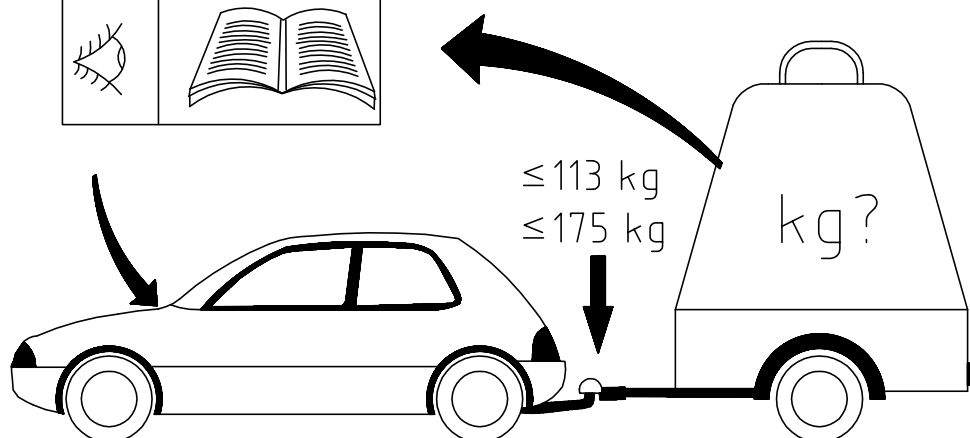





$$g = 9,81 \text{ m/s}^2$$

$$D = \frac{T \times R}{1000 \times (T+R)} \times g$$


$$T = \frac{R \times D \times 1000}{g \times R - 1000 \times D} \times g$$

$$R = \frac{T \times D \times 1000}{g \times T - 1000 \times D}$$

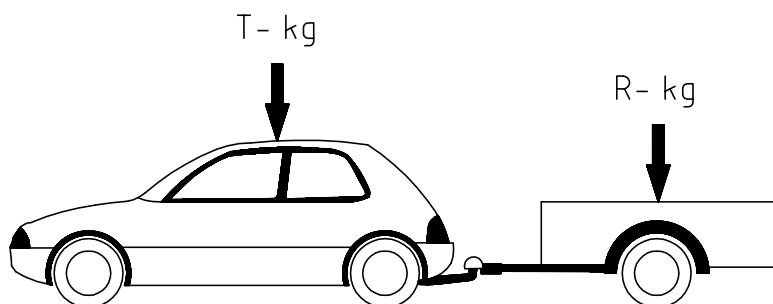

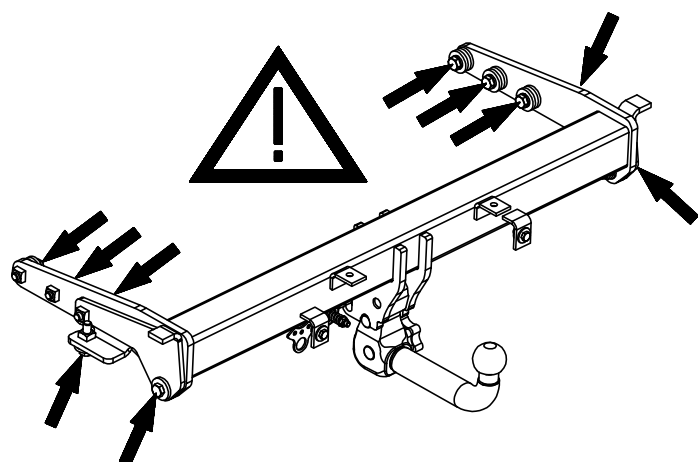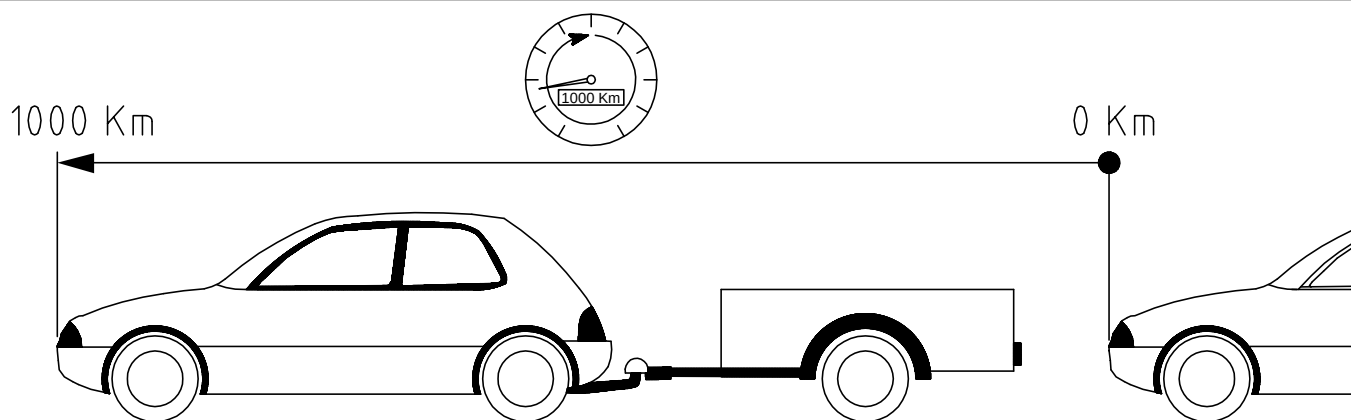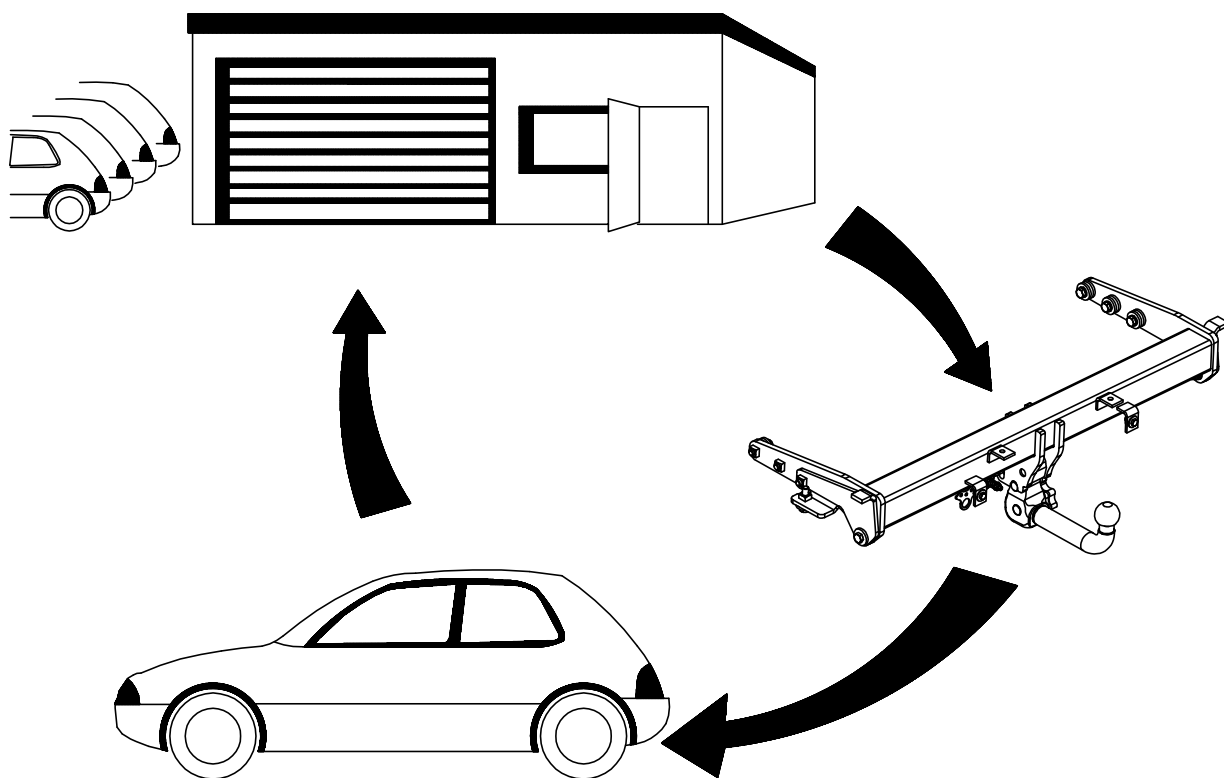

 M12	0 Km 	1000 Km 
---	---	--

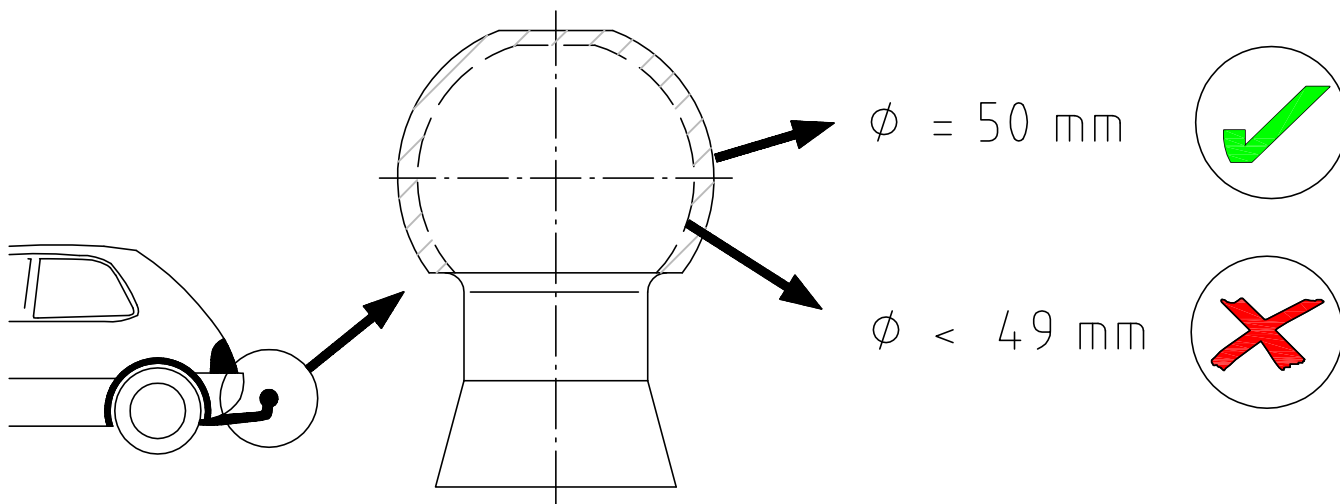

Approval Number

E4 55R-01 0095

Type: 0845-A D-Value: 15,8 kN

Class: A50-X S-Value: 175 kg



Made in Germany


www.mvg-ahk.de

Zulässige Stützlast
maximal 113 kg




Zulässige Stützlast
maximal 175 kg



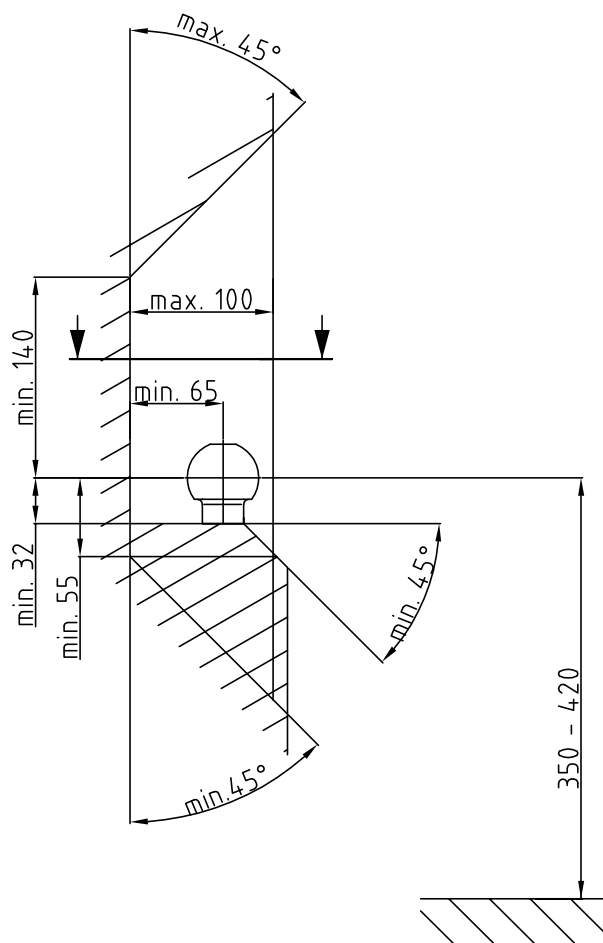
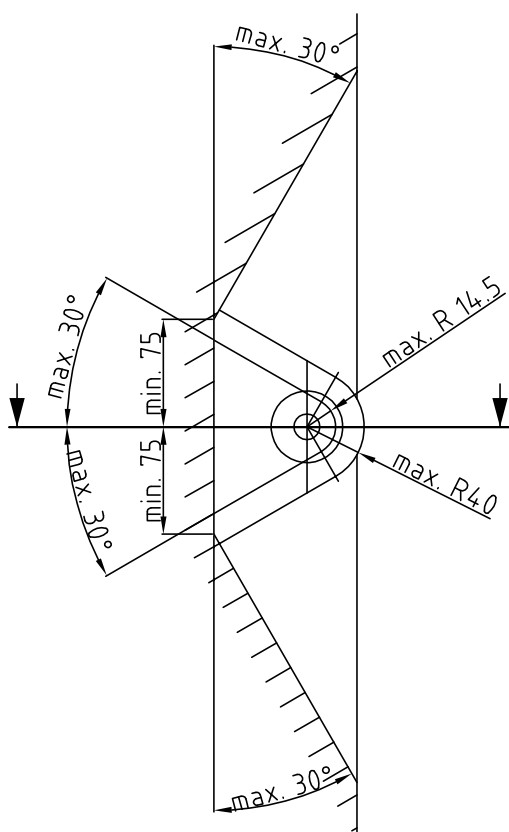


1	1x		0845 A		
2	1x		2020-A-16.1		
3	je. 1				
4	8x		M12x45	(8.8)	ISO 4017
5	2x		M12x55	(8.8)	ISO 4017
6	8x		A13	(FSt.)	DIN 127
7	10x		ø 13/35x5		DIN 6340
8	2x		ø 13/24x2,5		ISO 7089
9	2x		M12	(8)	ISO 7042
10	4x		M8x20	(8.8)	ISO 4017
11	8x		ø 8,4/24x2		ISO 7093
12	5x		M8	(8)	ISO 7042
13	1x		M8x45	(8.8)	ISO 4017
14	1x				
15	1x		ø 8,4/16x1,6		ISO 7089
16	1x				
17	1x		0845 A		
18	1x		System 2020		
19	1x				0062
20	1x				
21	1x				1012






22	1x		113 kg.	1016
23	1x		175 kg.	1016
24	2x			
25	2x		ø 8,4/16x1.6	DIN 125 PA6.6
26	2x			
27	8x			

(E)	Volumen de suministro del enganche
(D)	Lieferumfang der Anhängervorrichtung
(GB)	Scope of delivery of towing hitch
(F)	Pièces comprises dans la fourniture de l'attelage
(NL)	Leveringsomvang trekhaak
(S)	Dragkrokens leveransspecifikation
(CZ)	Objem dodání tažného zařízení
(I)	Dotazione del gancio di traino


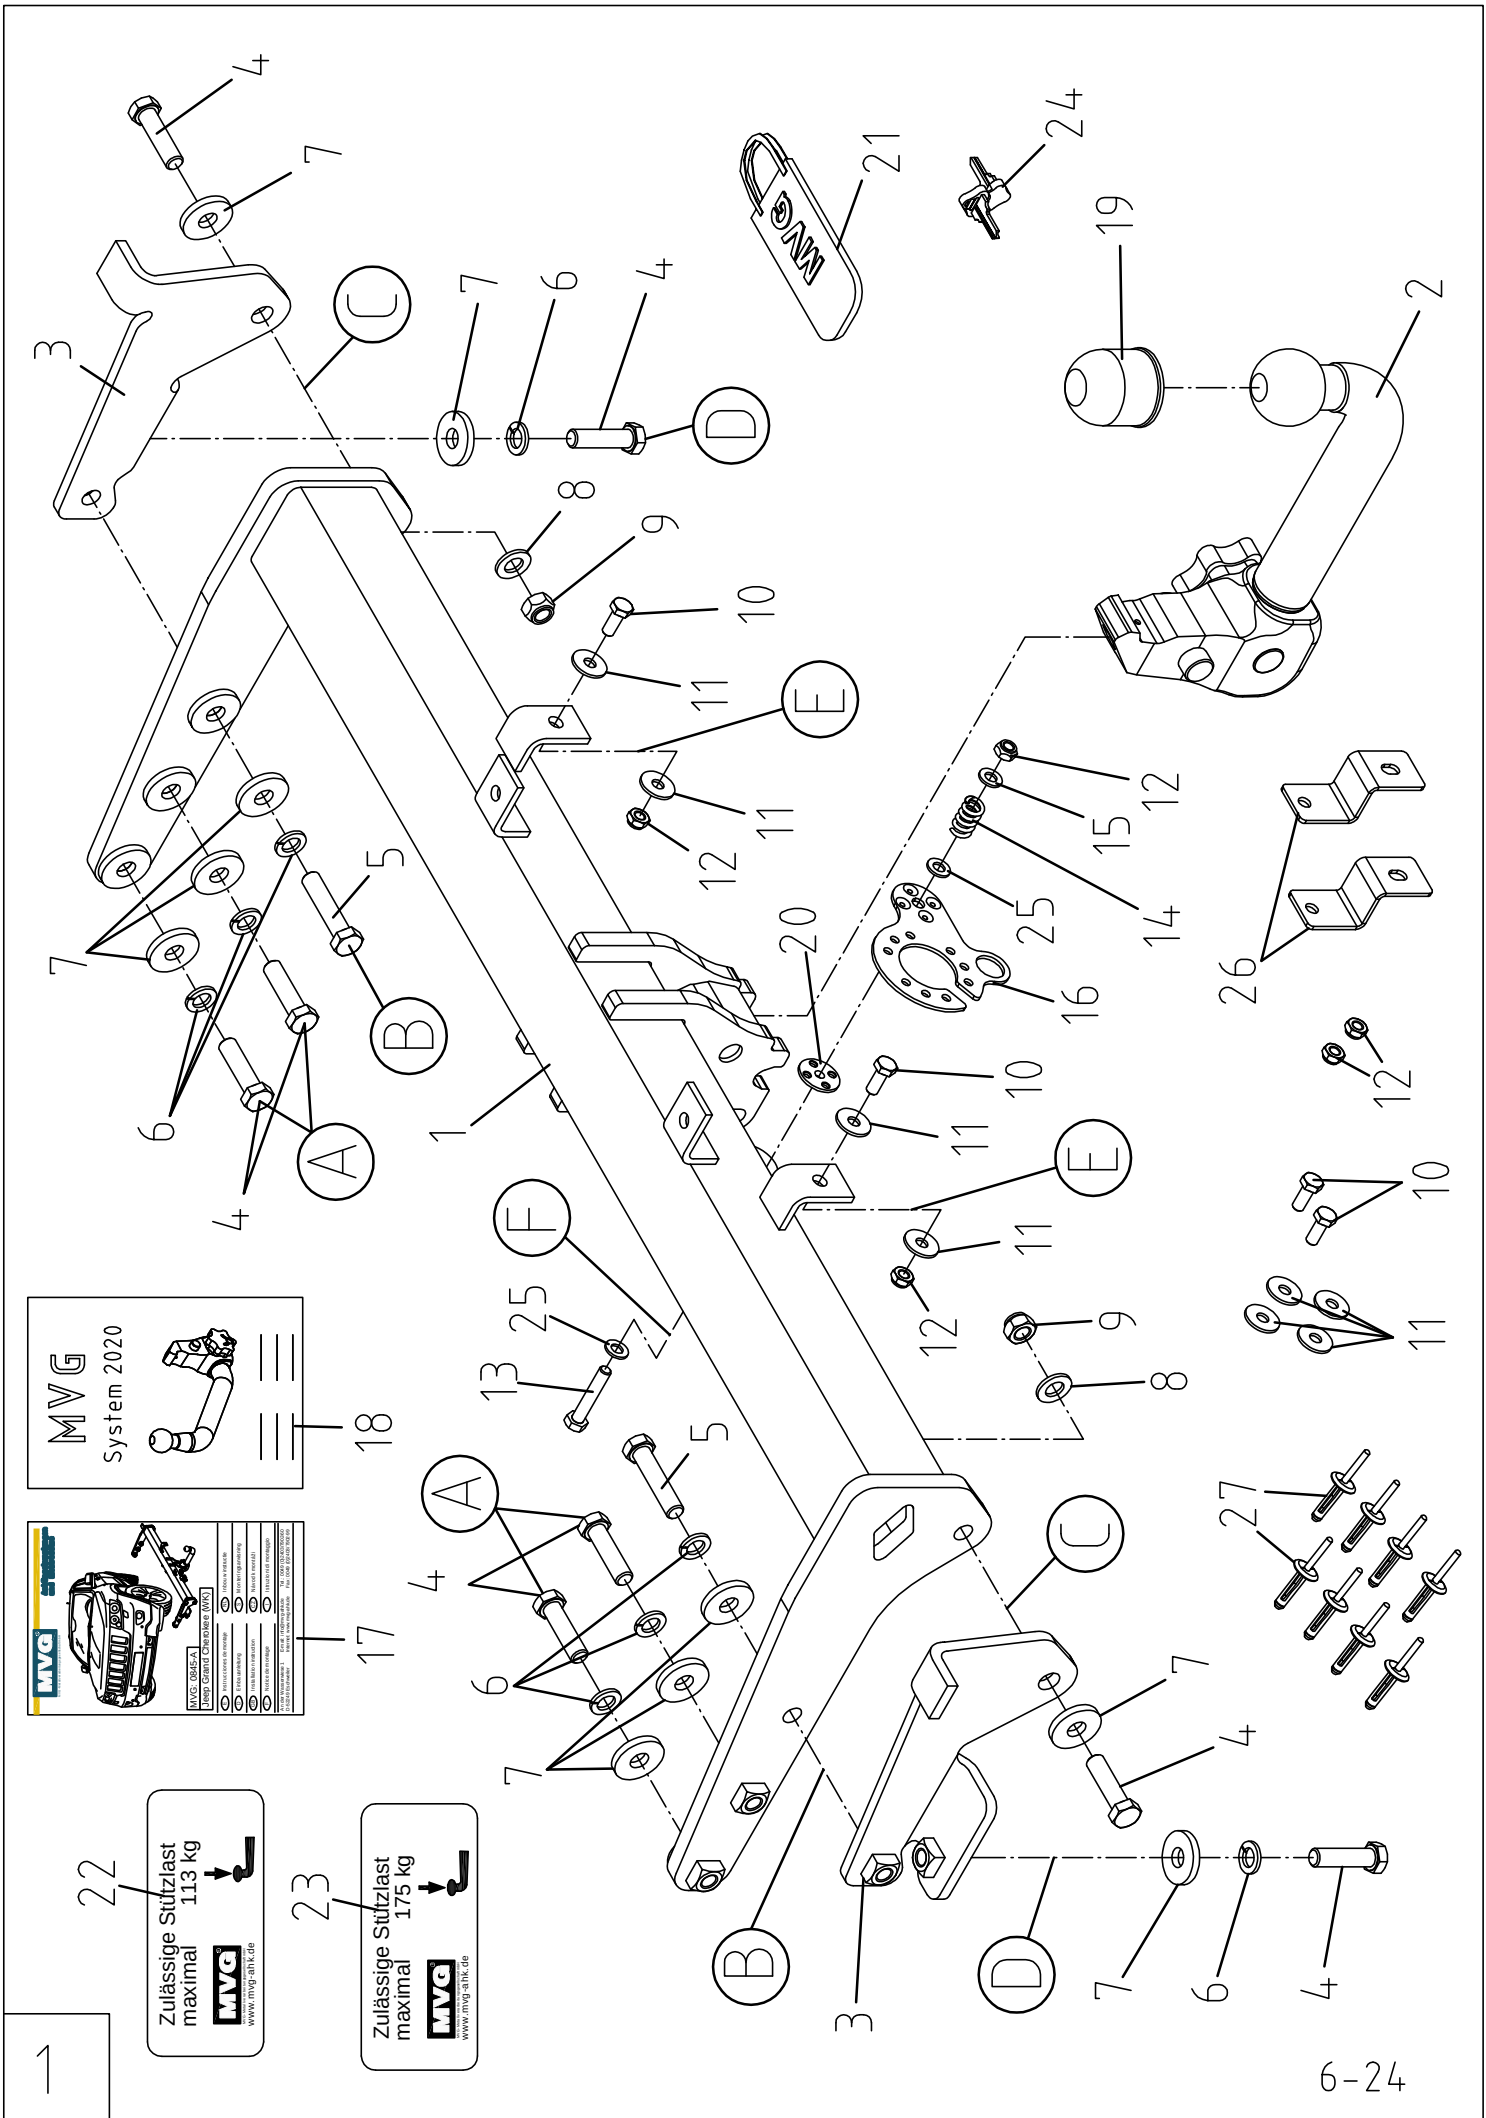


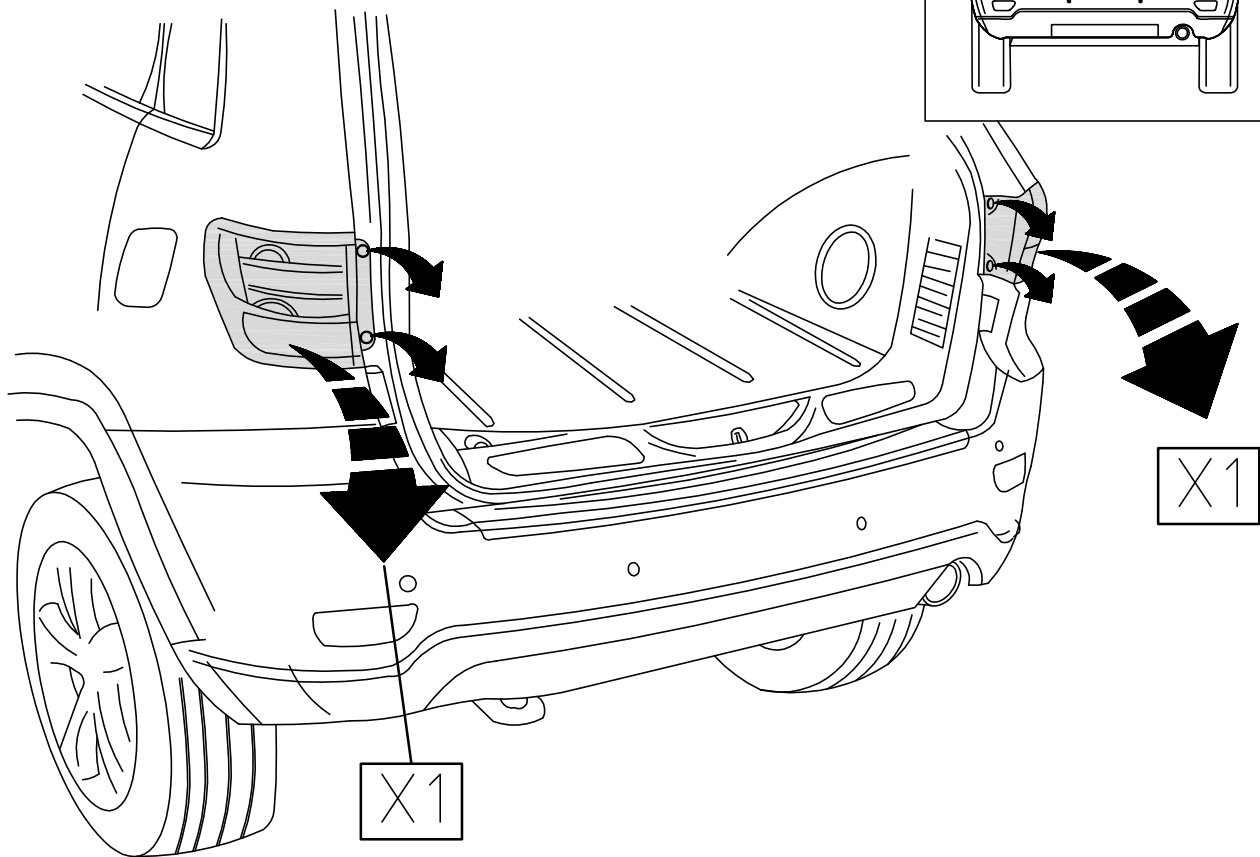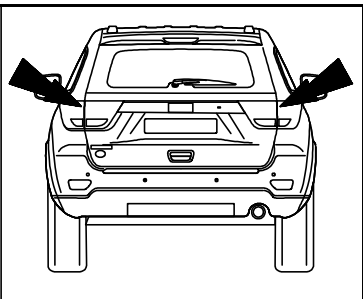




2

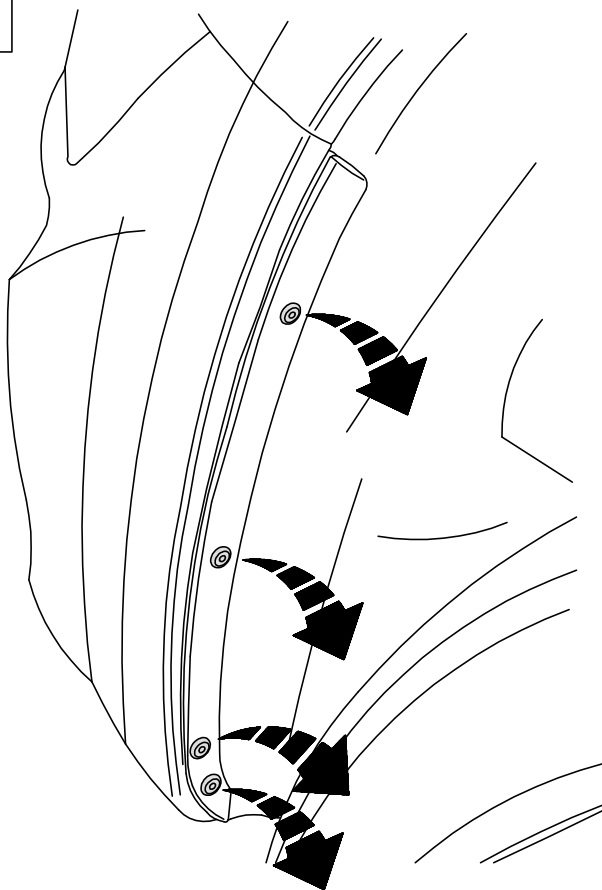





3


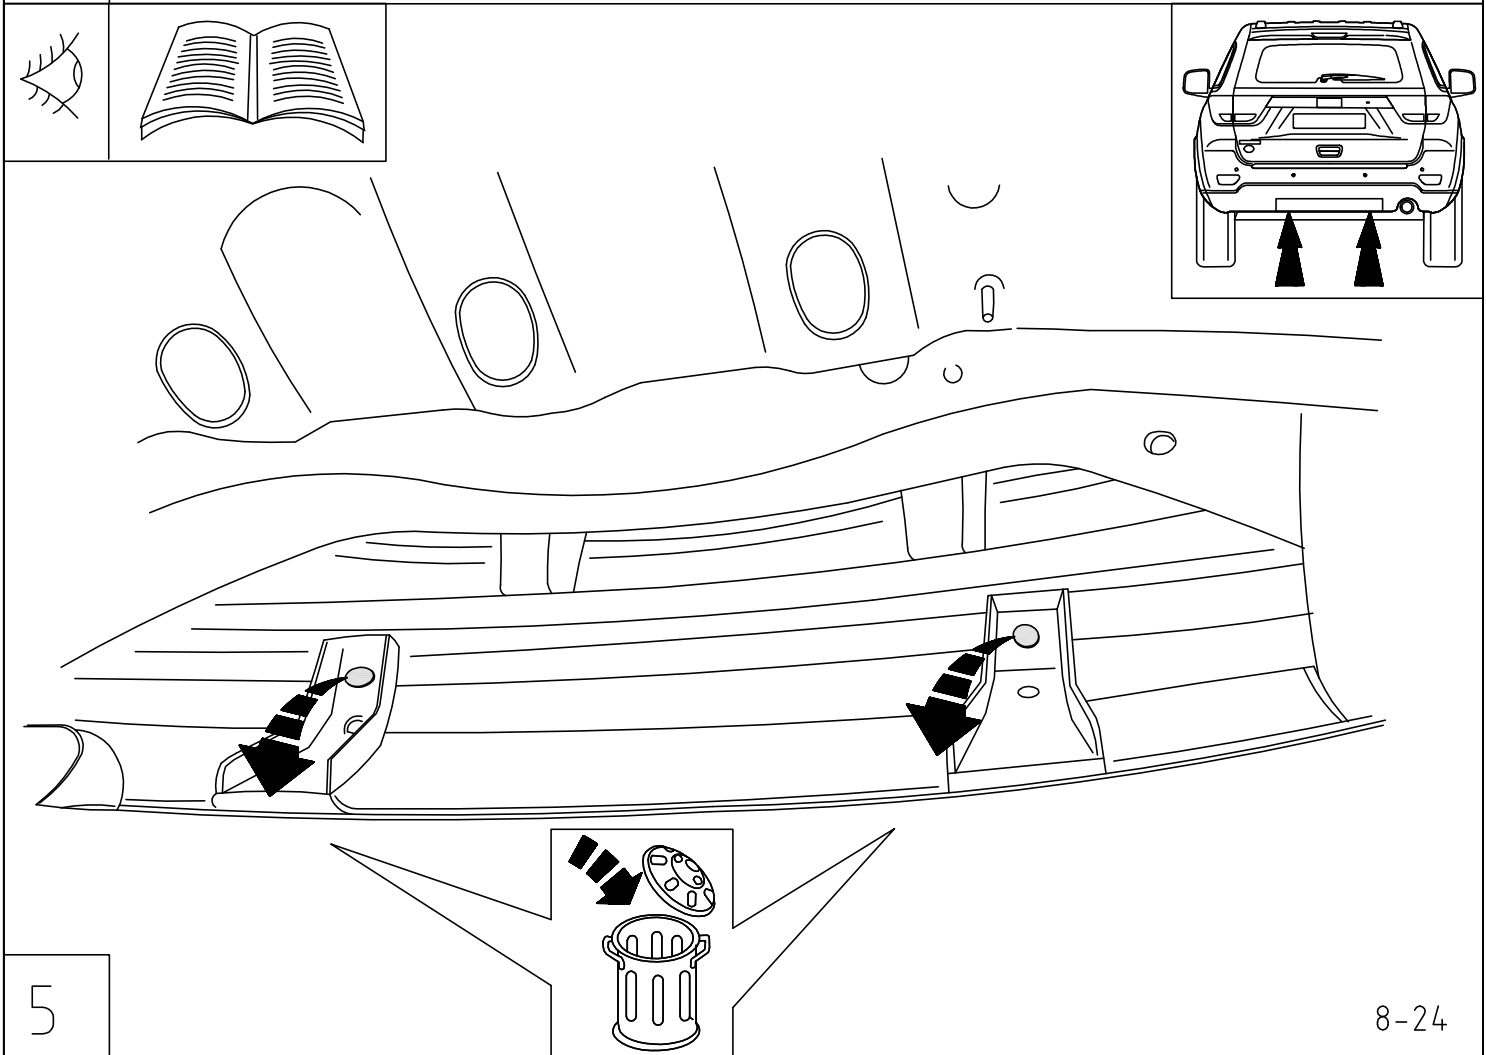
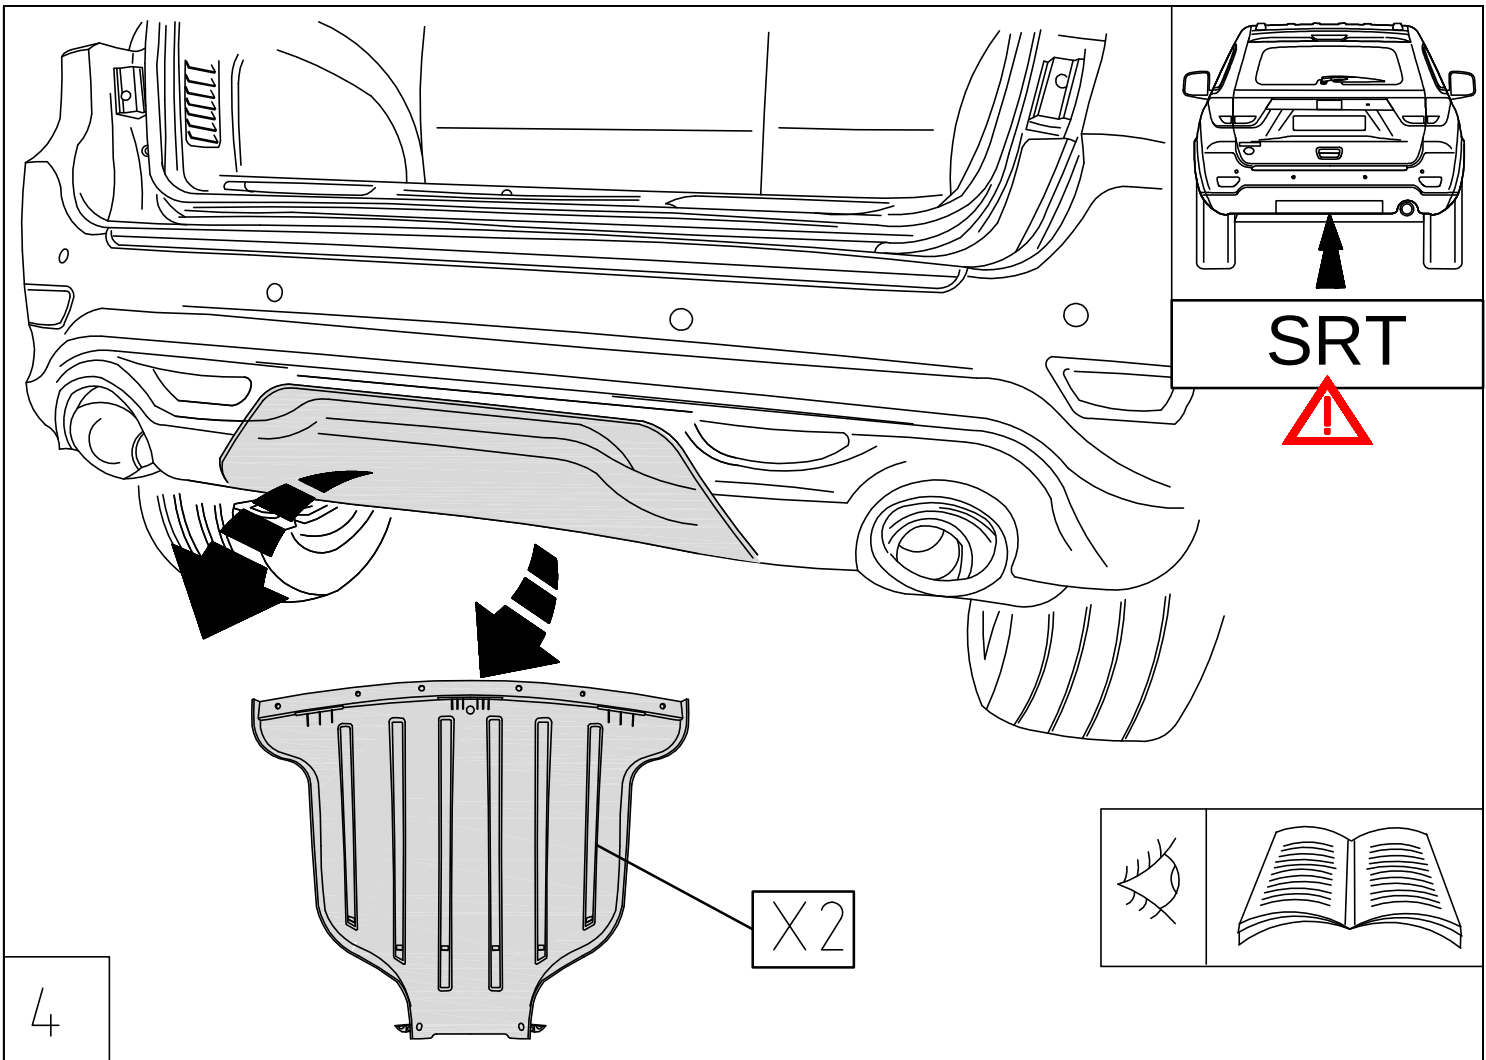


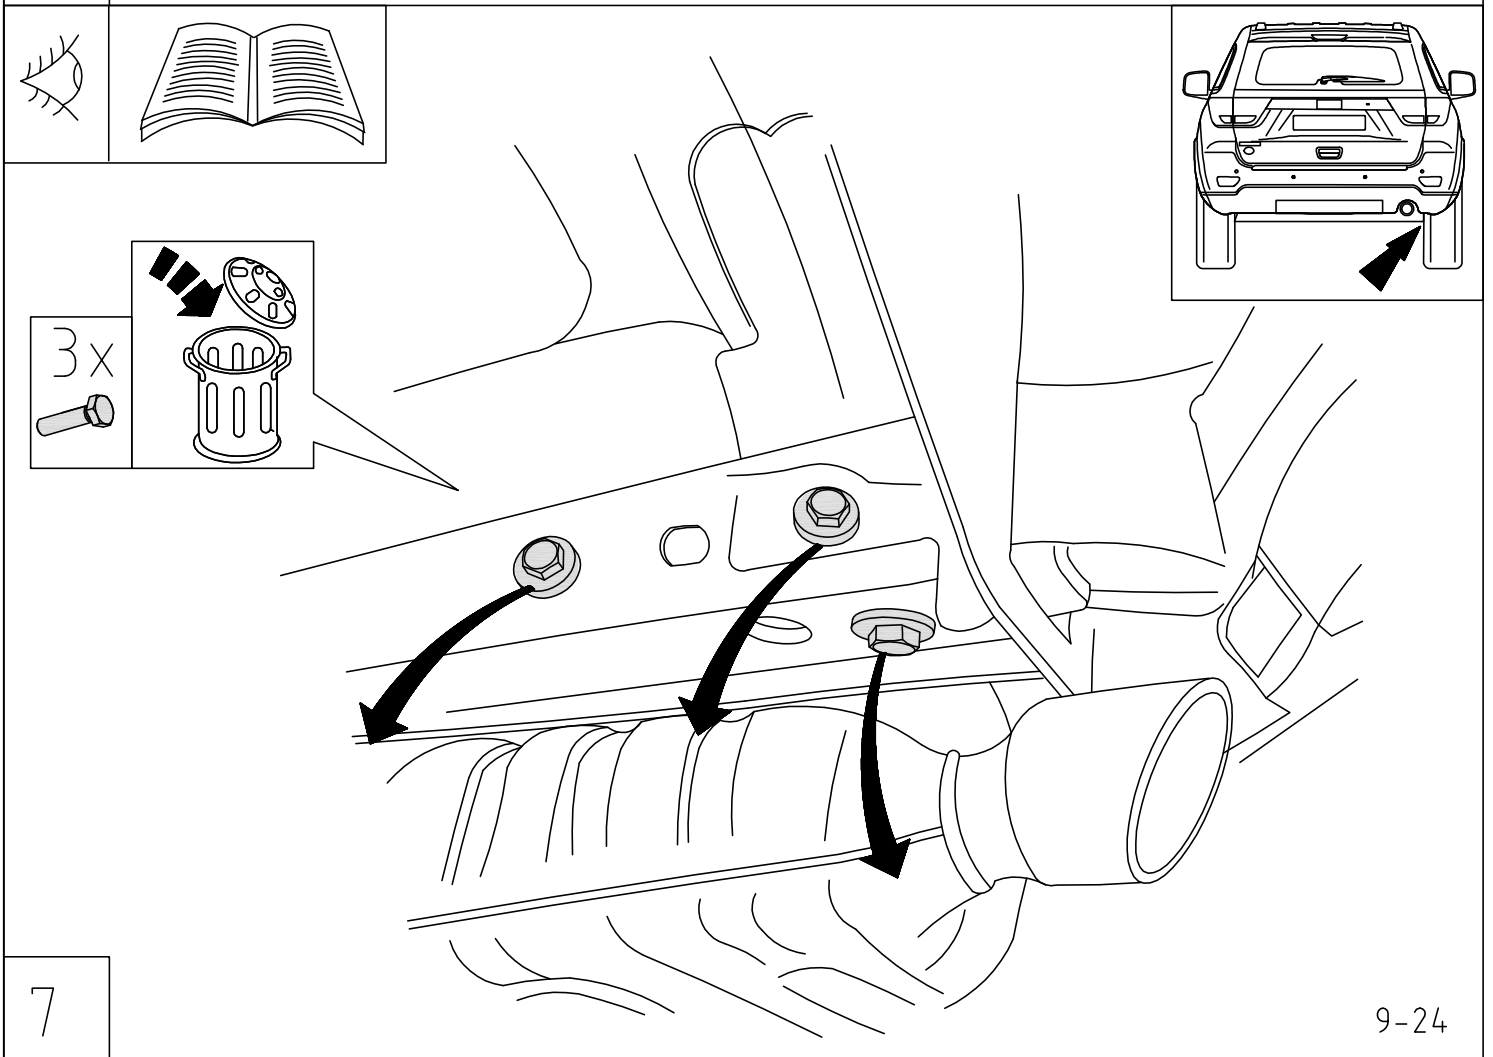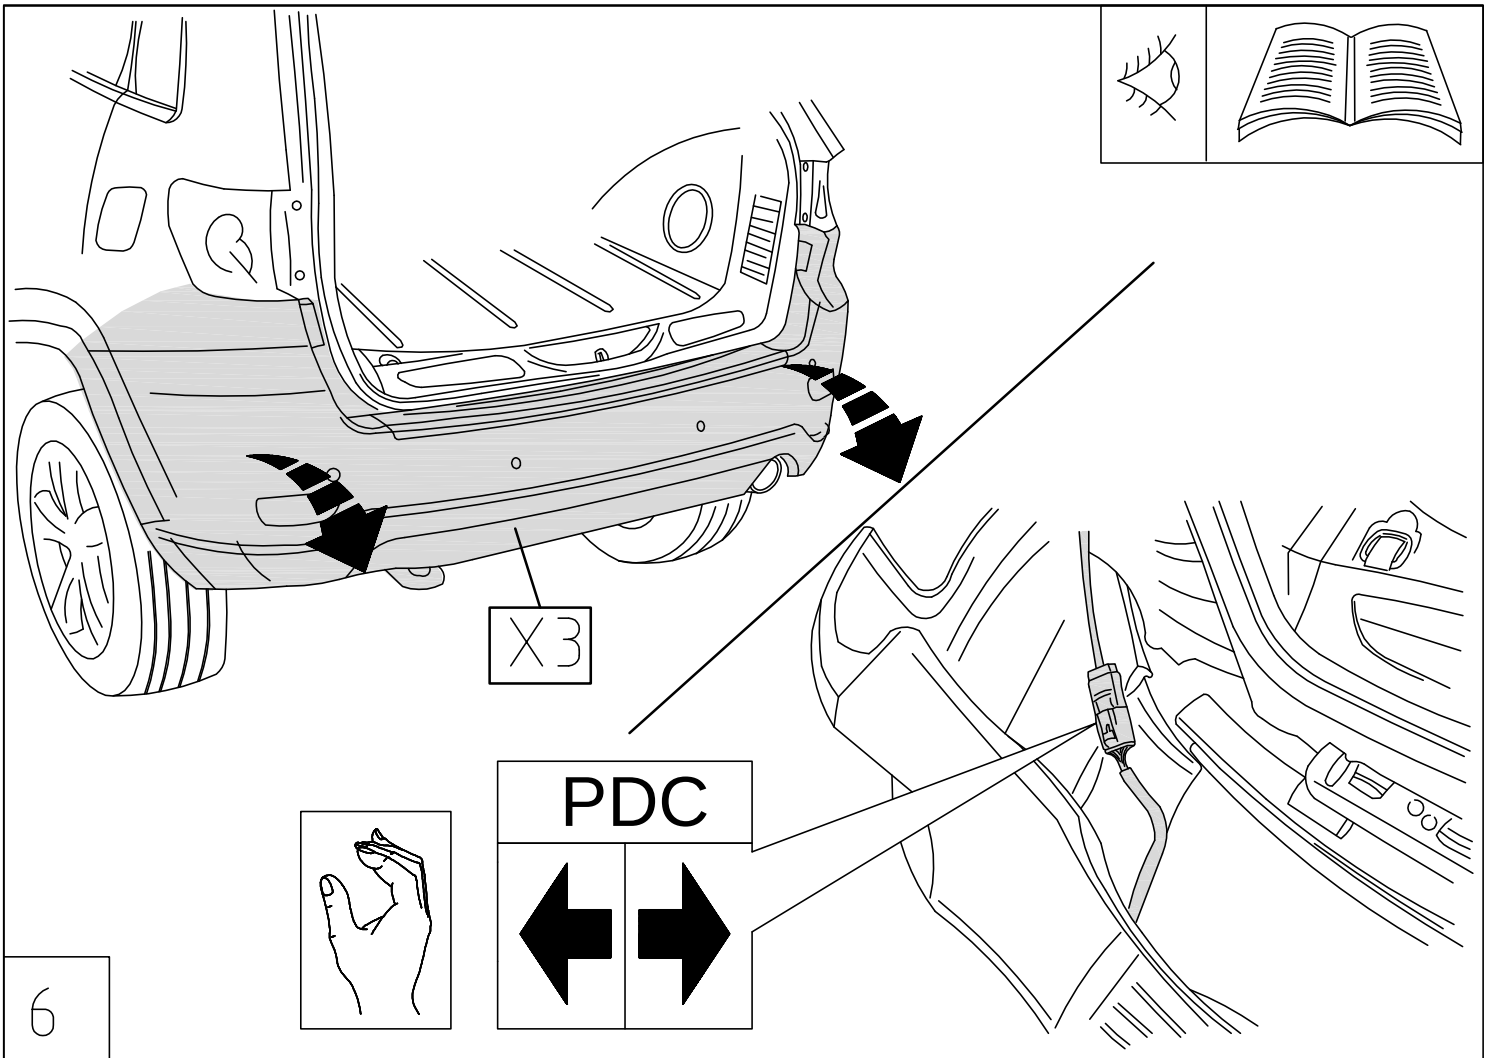

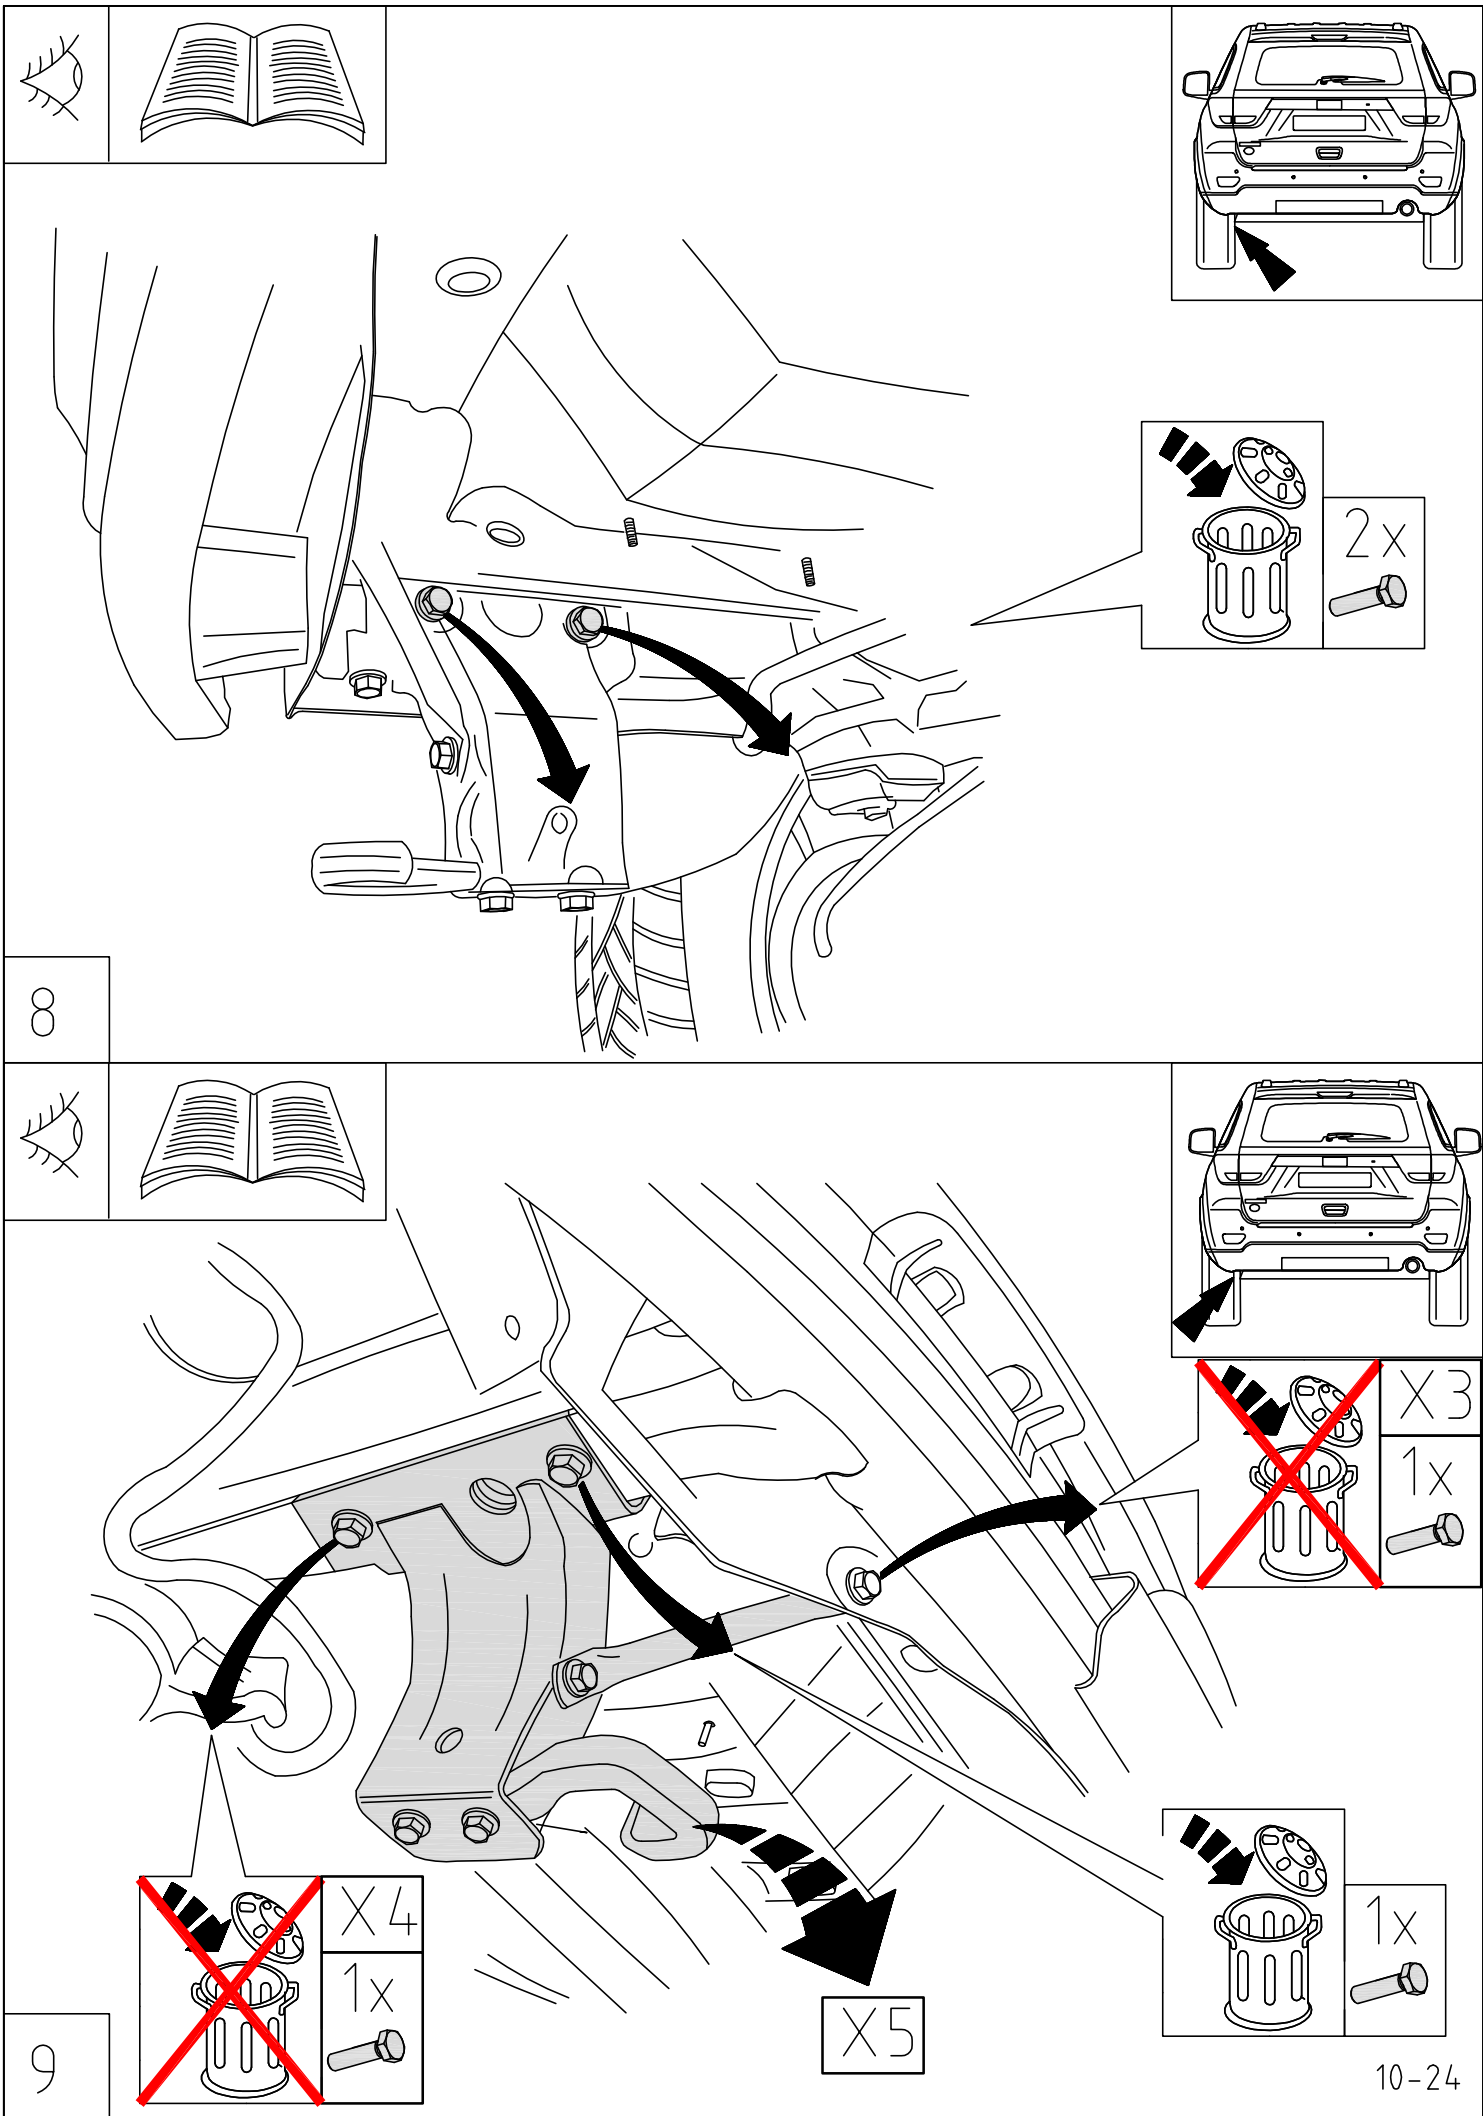

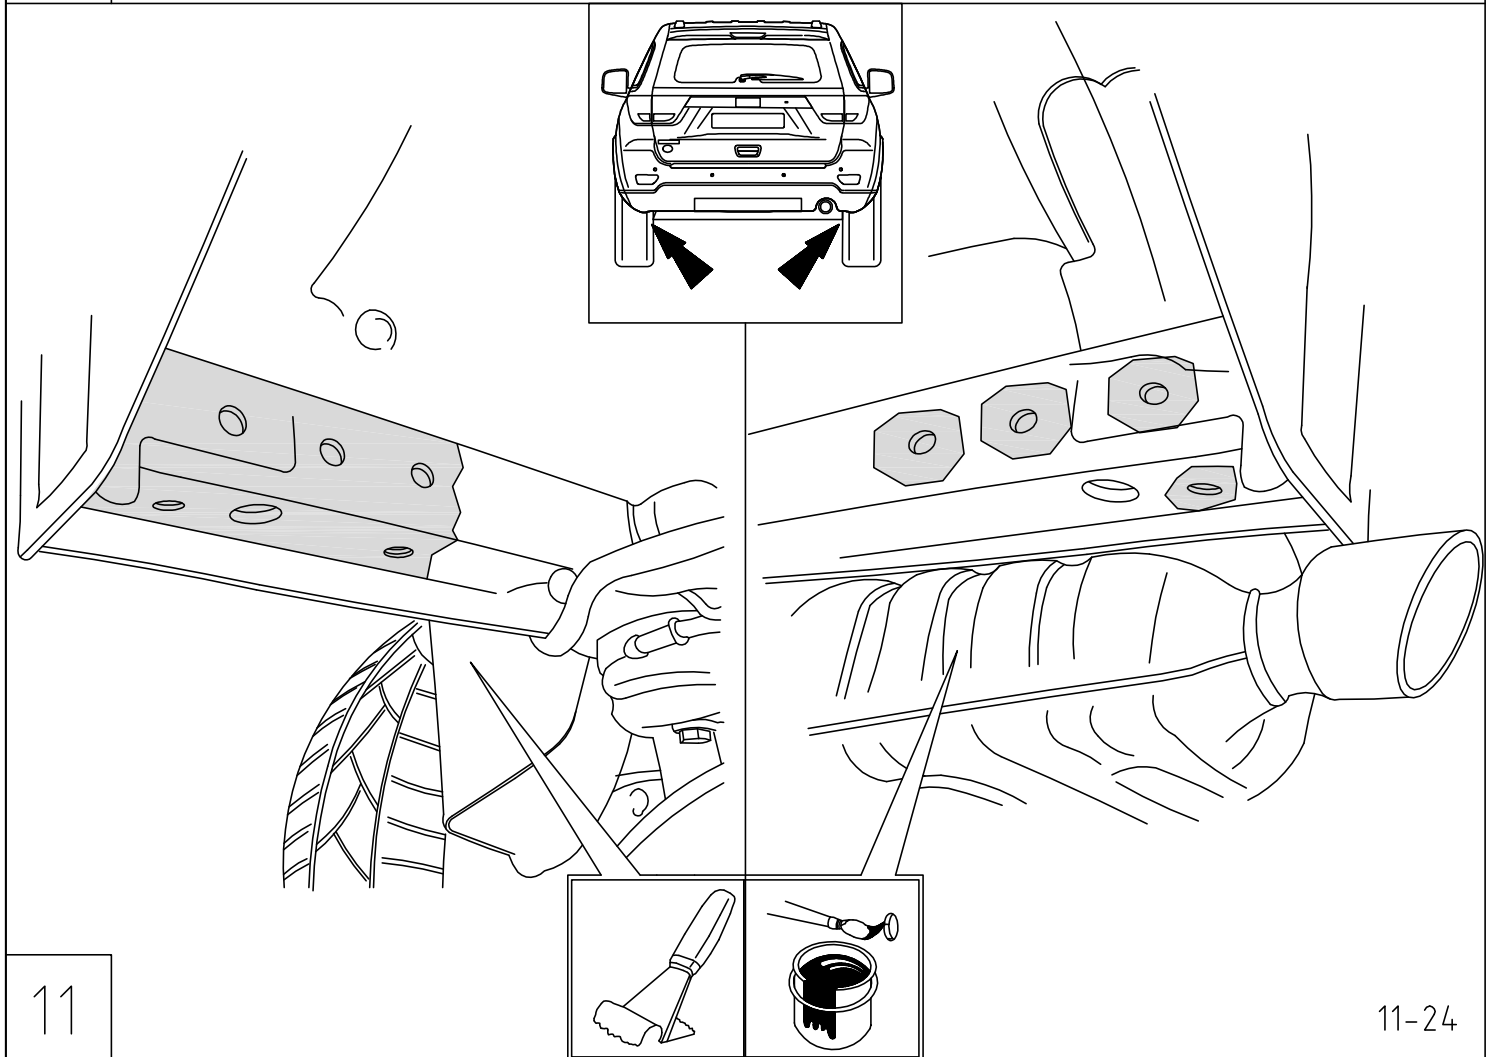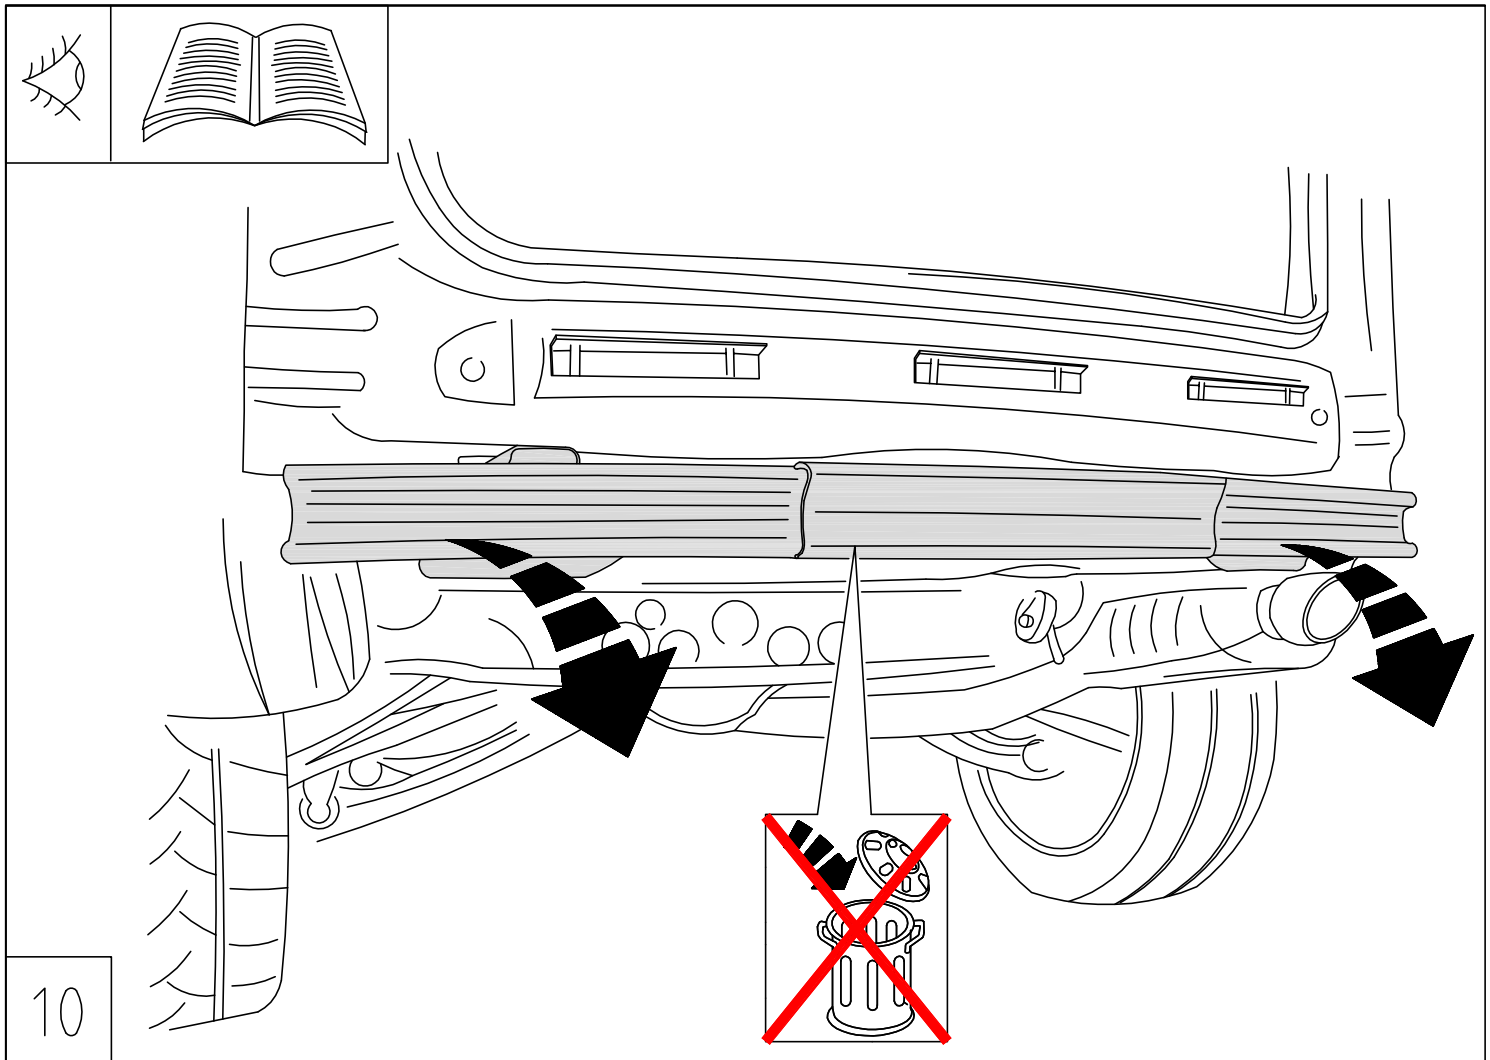




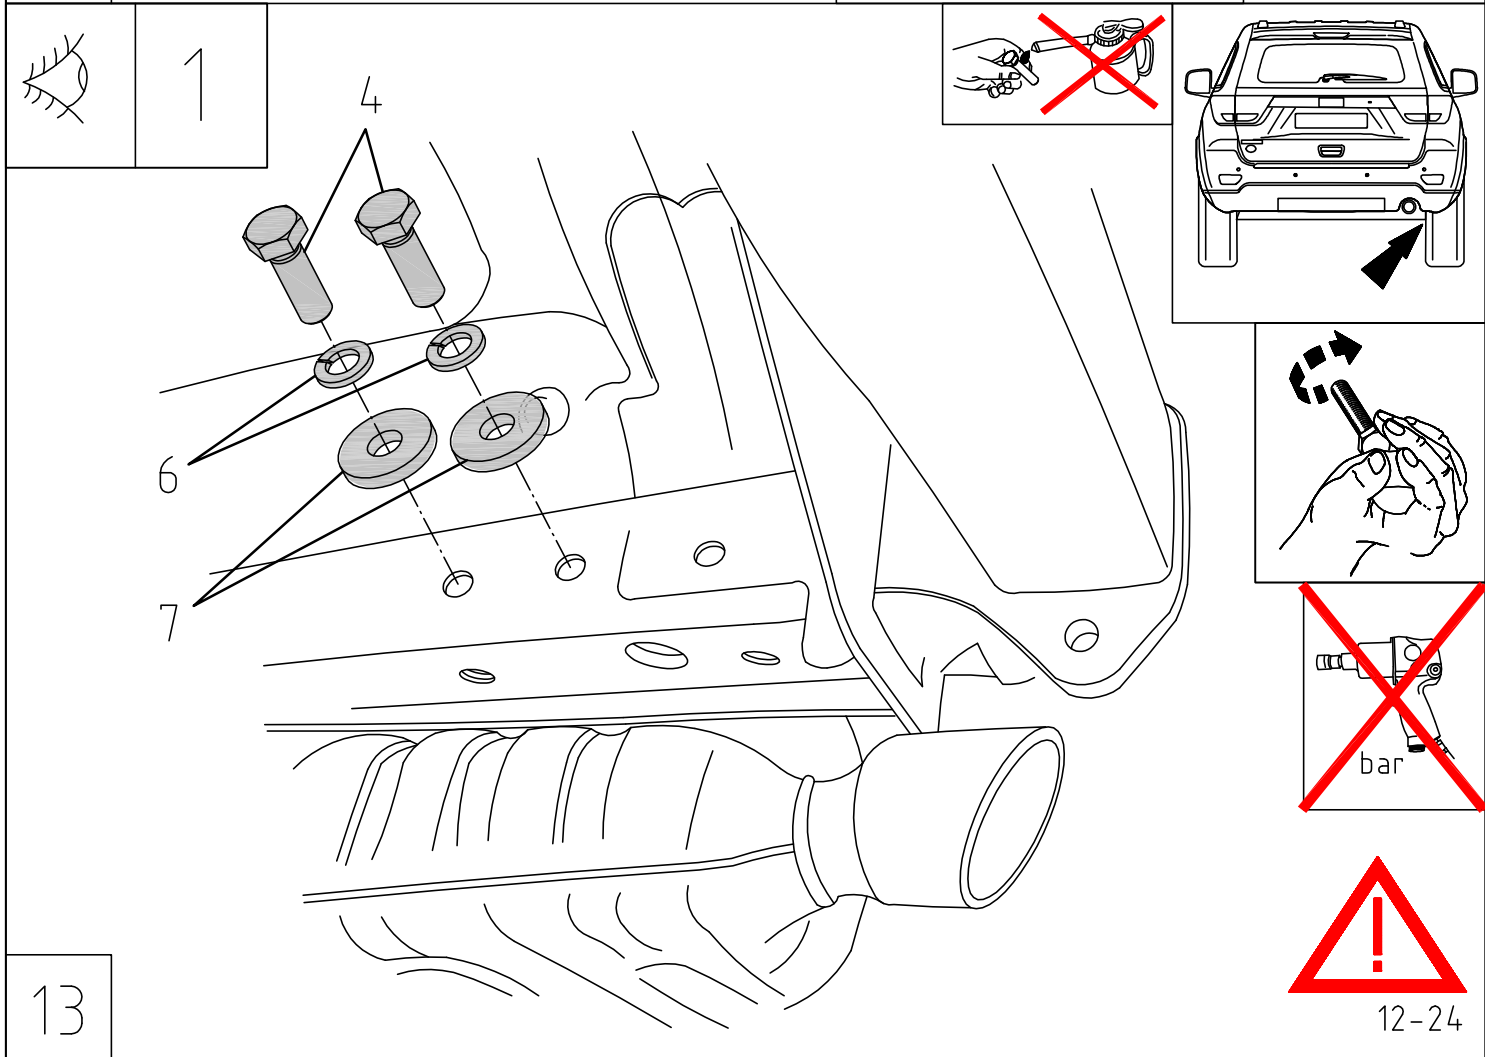
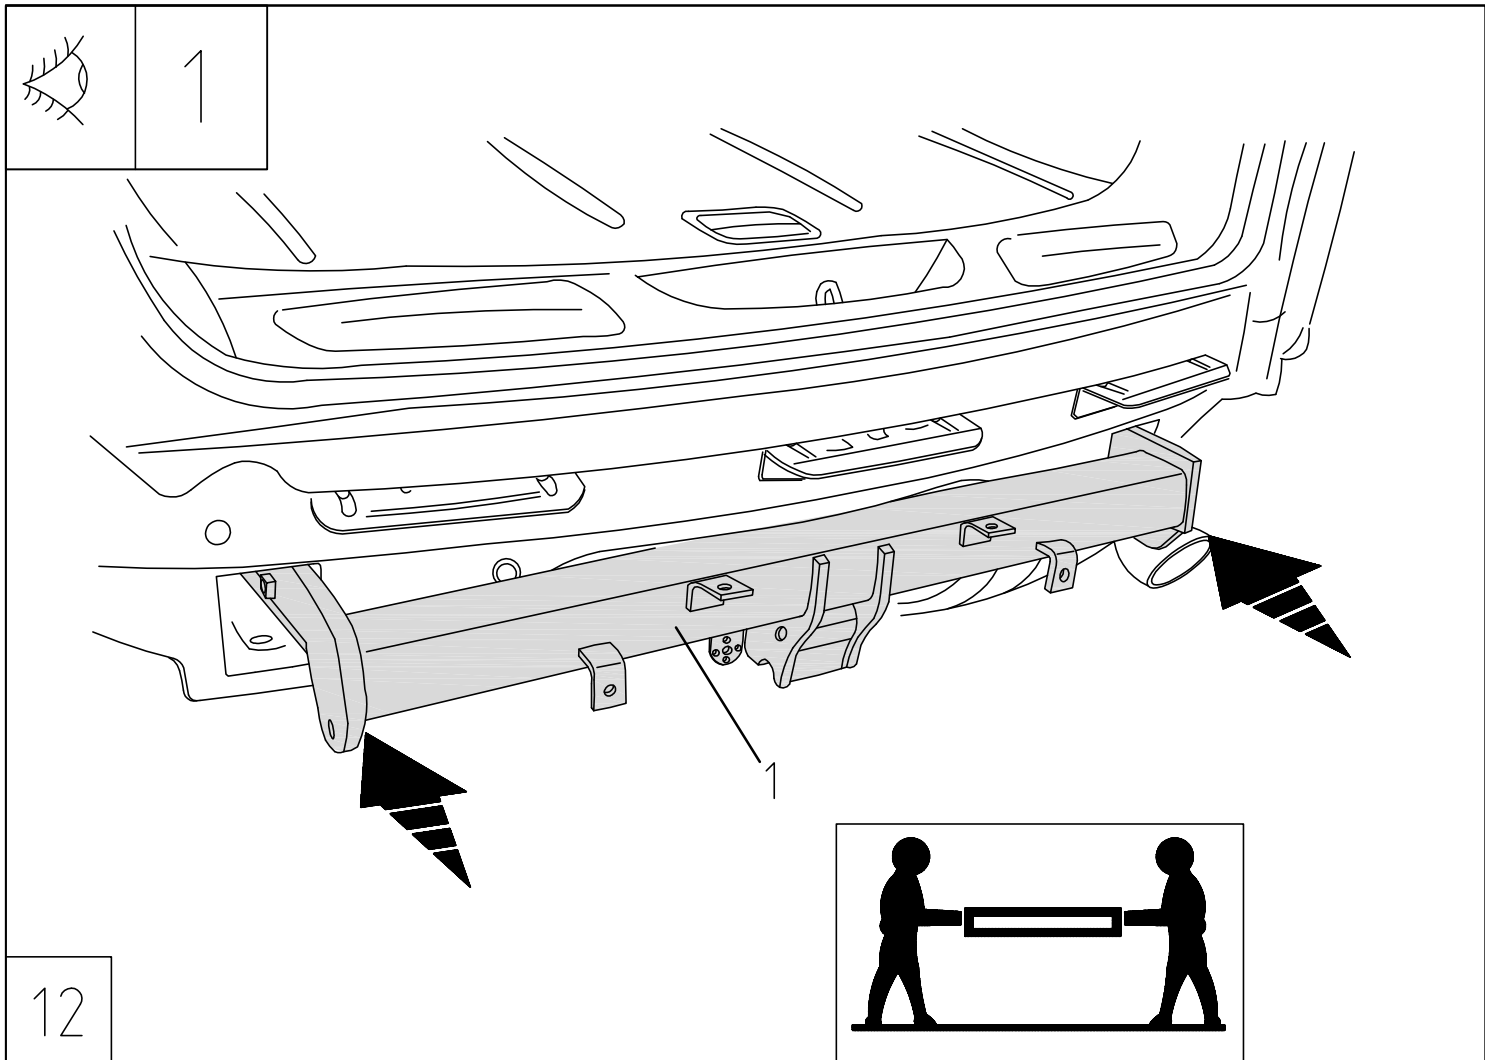


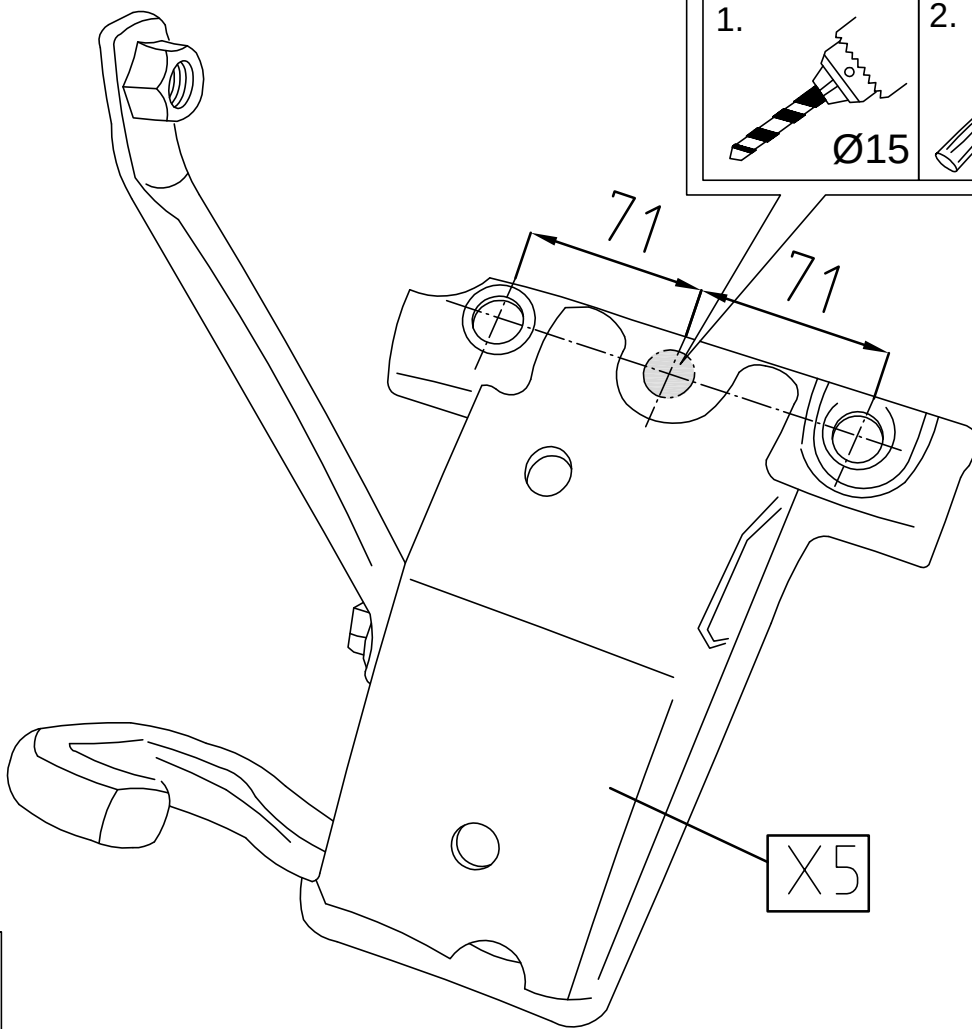

14







1

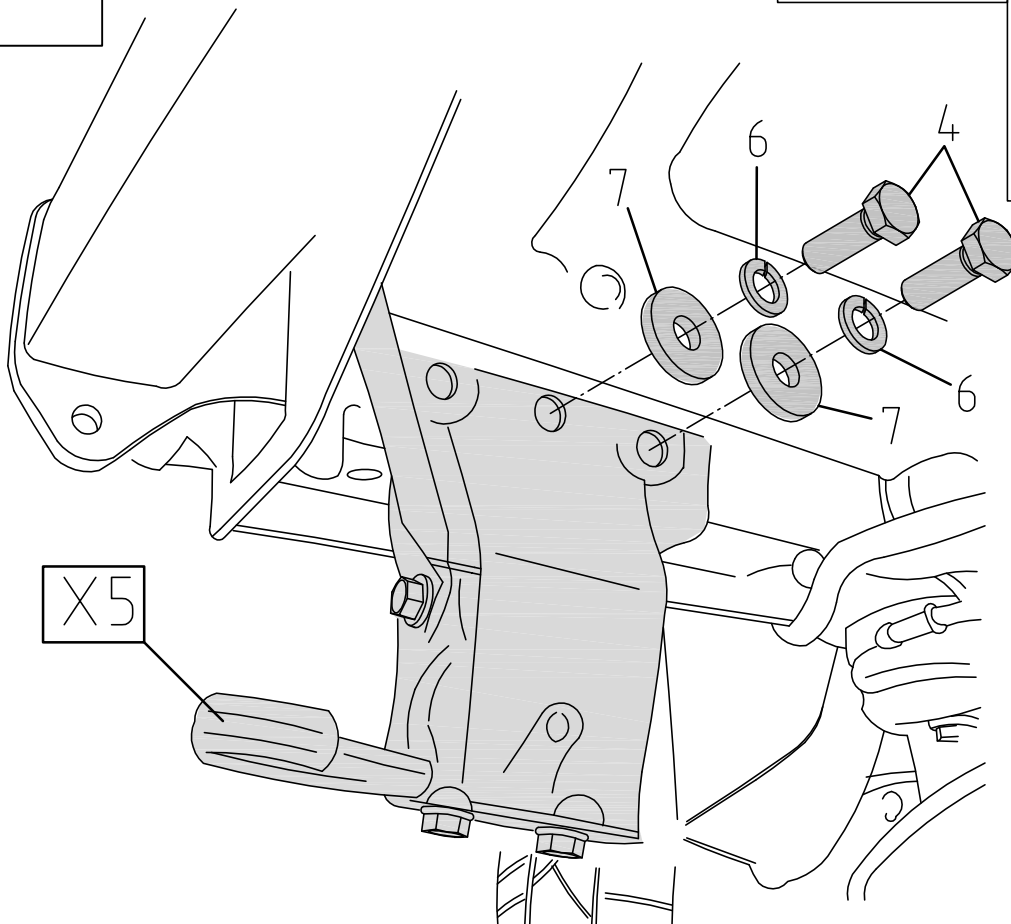





15



13-24

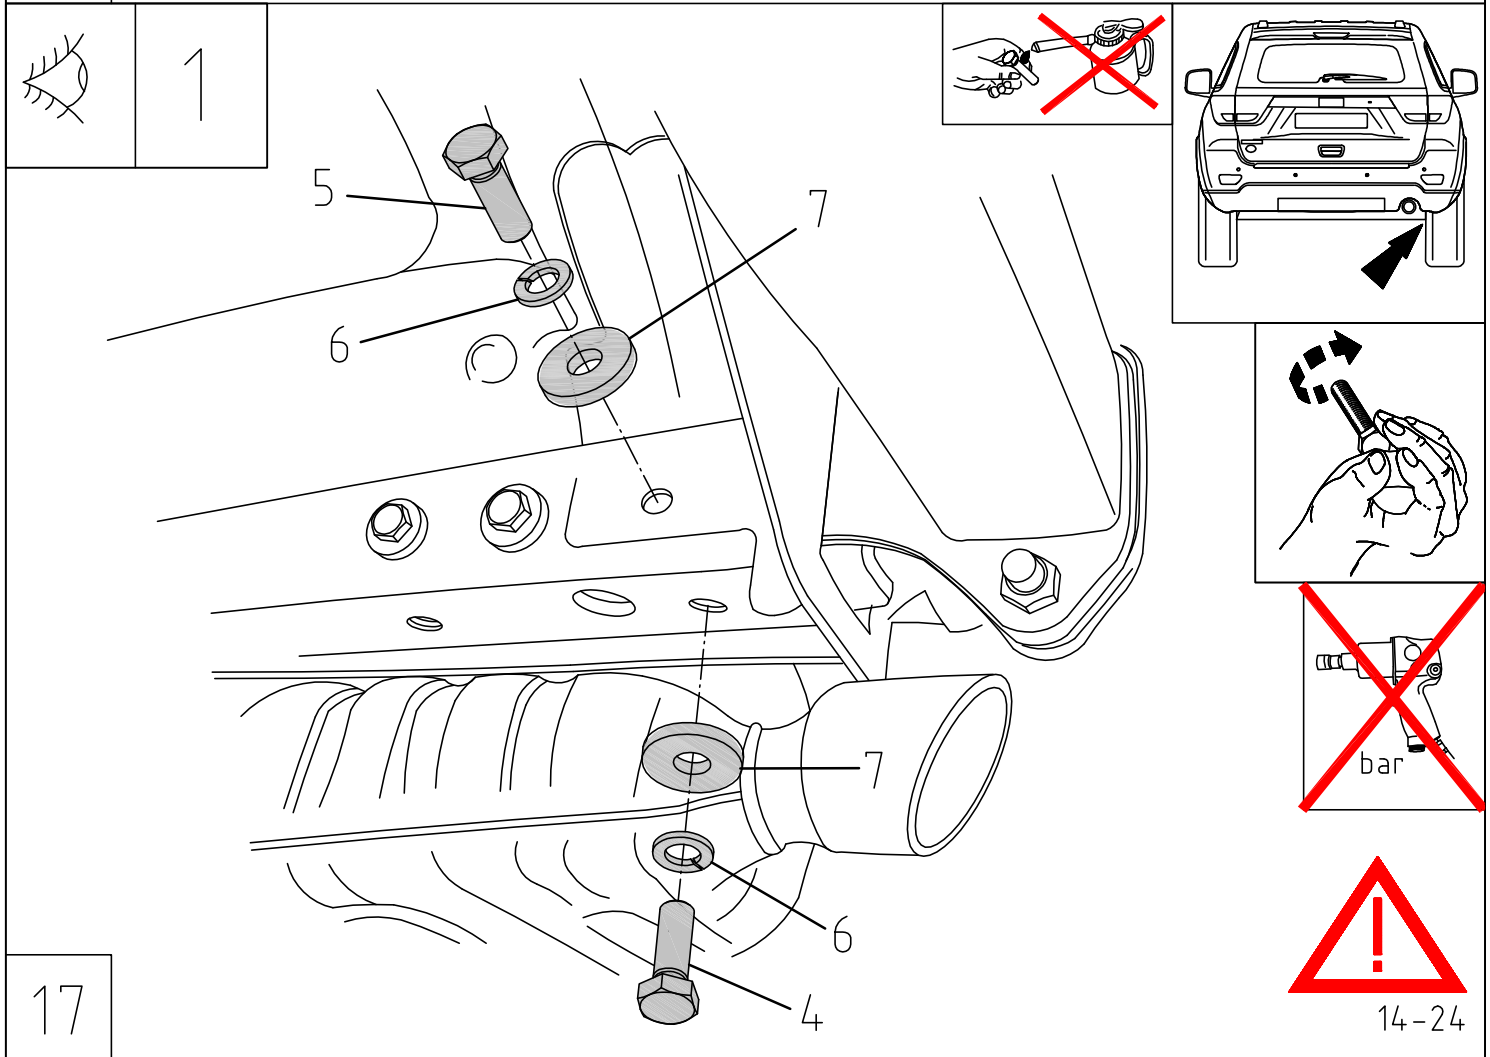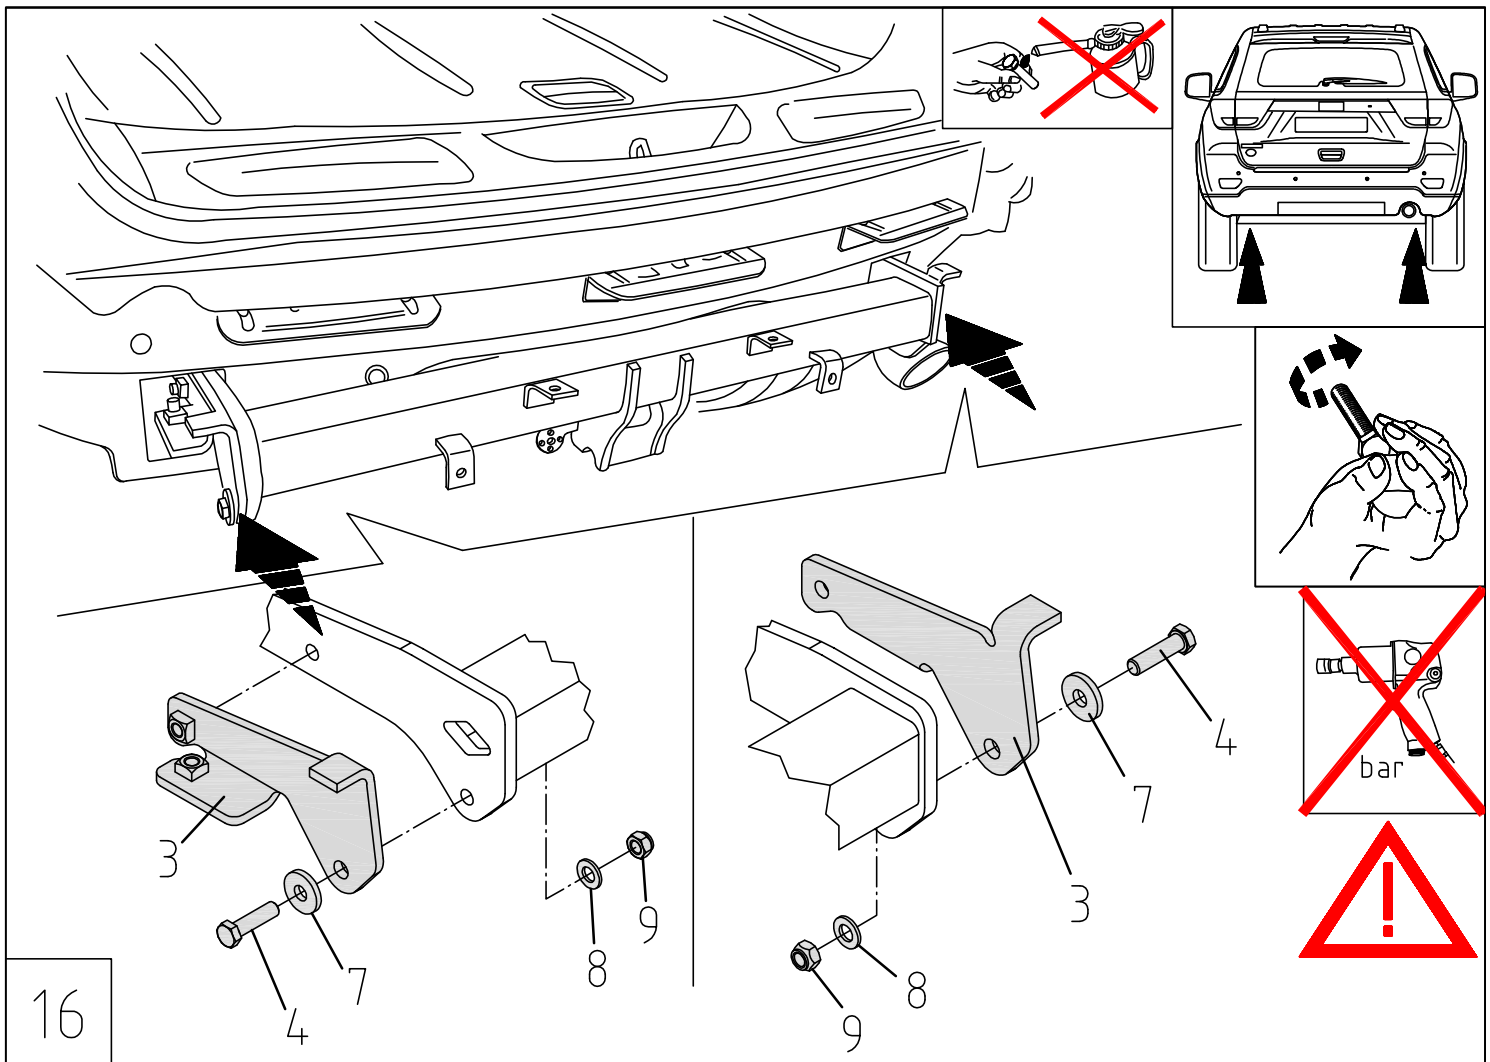

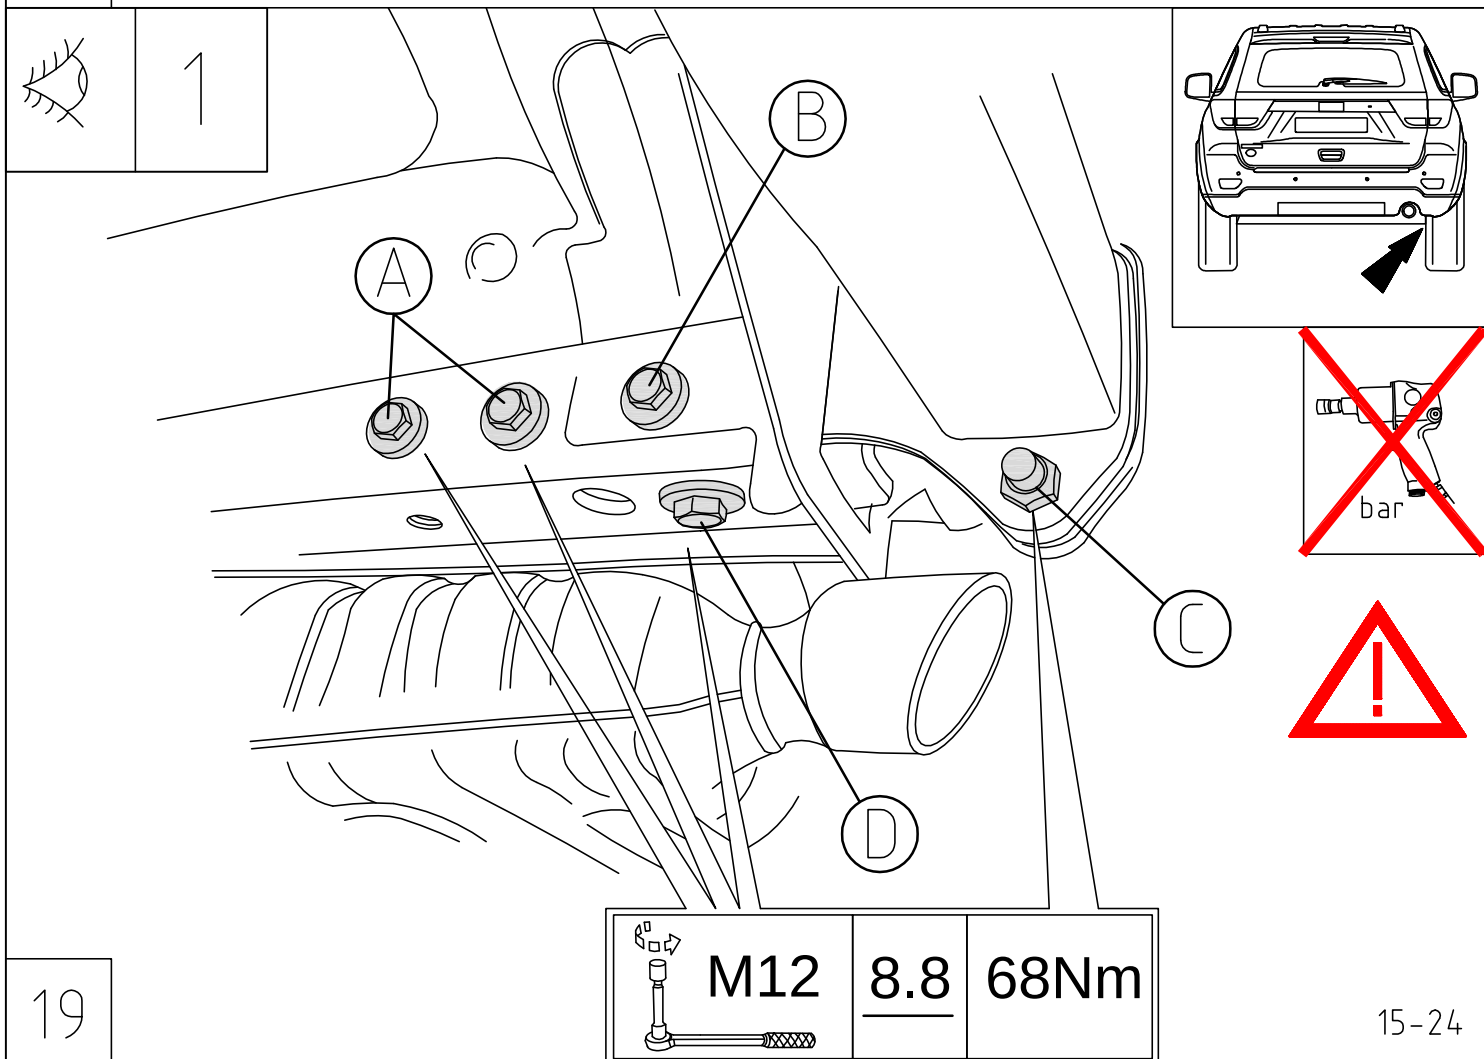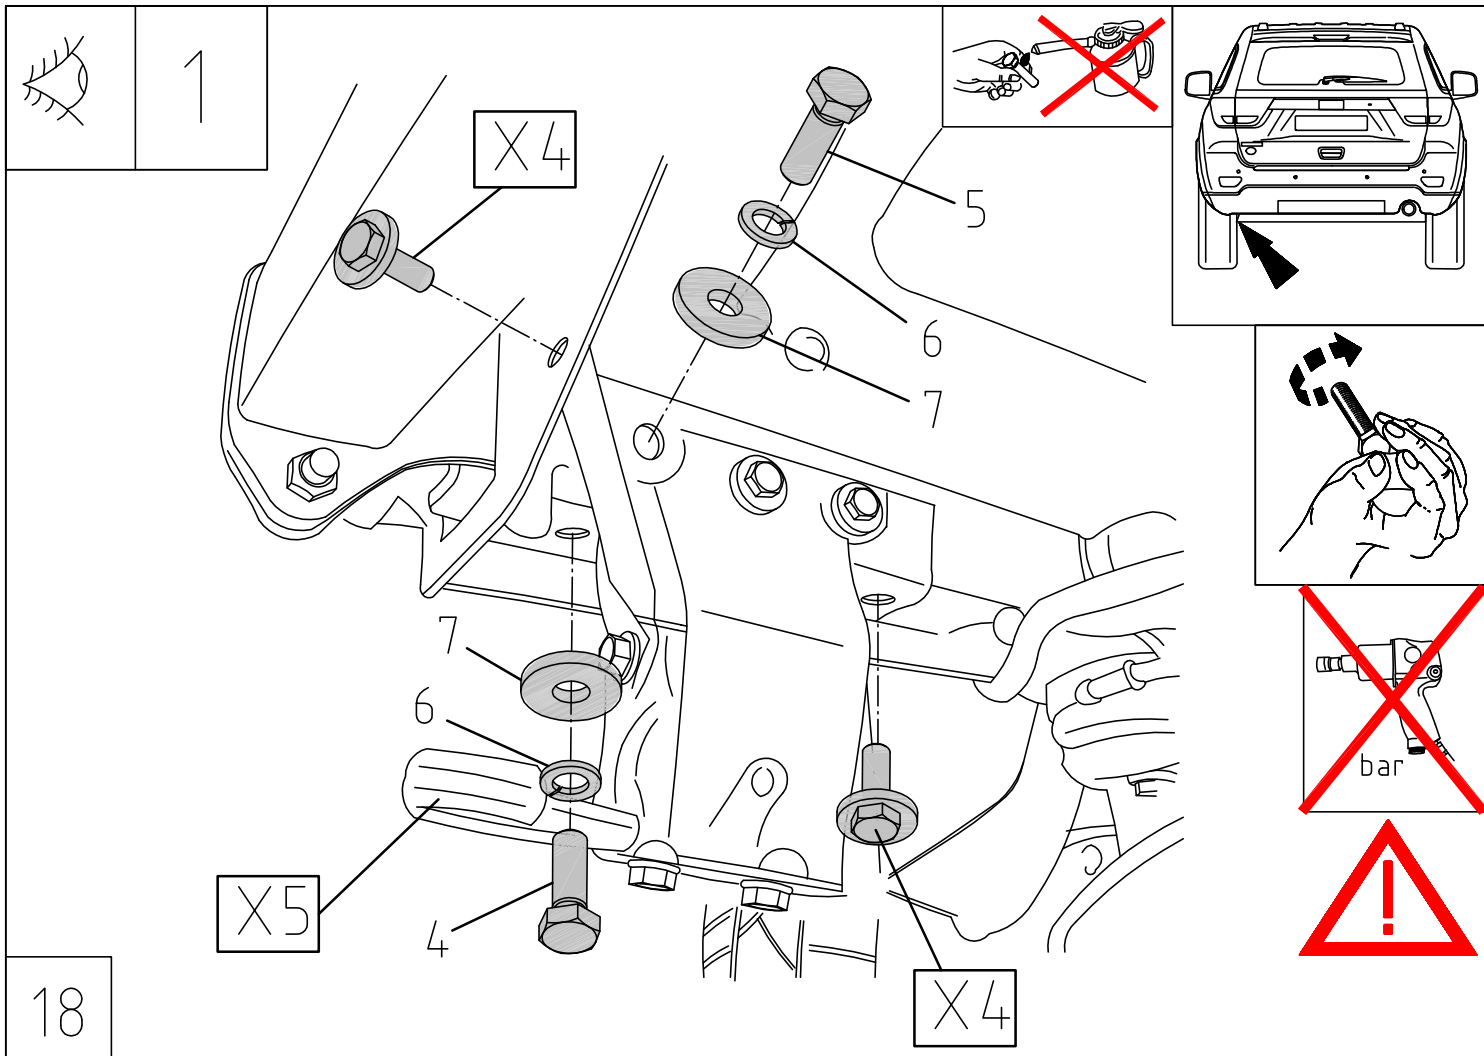

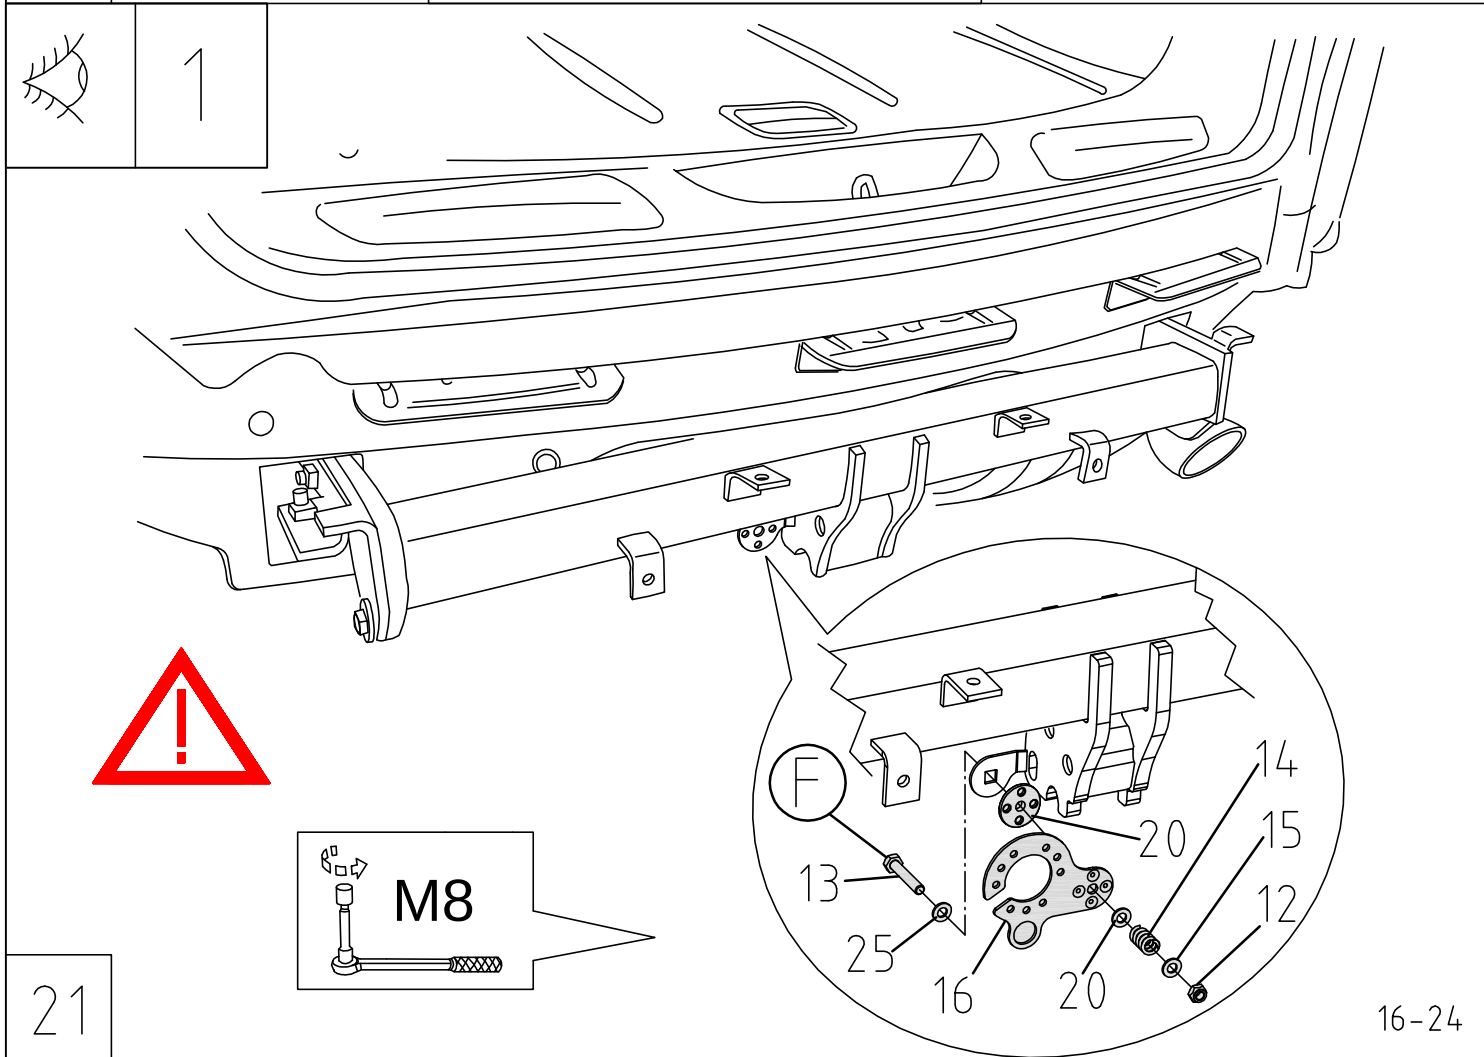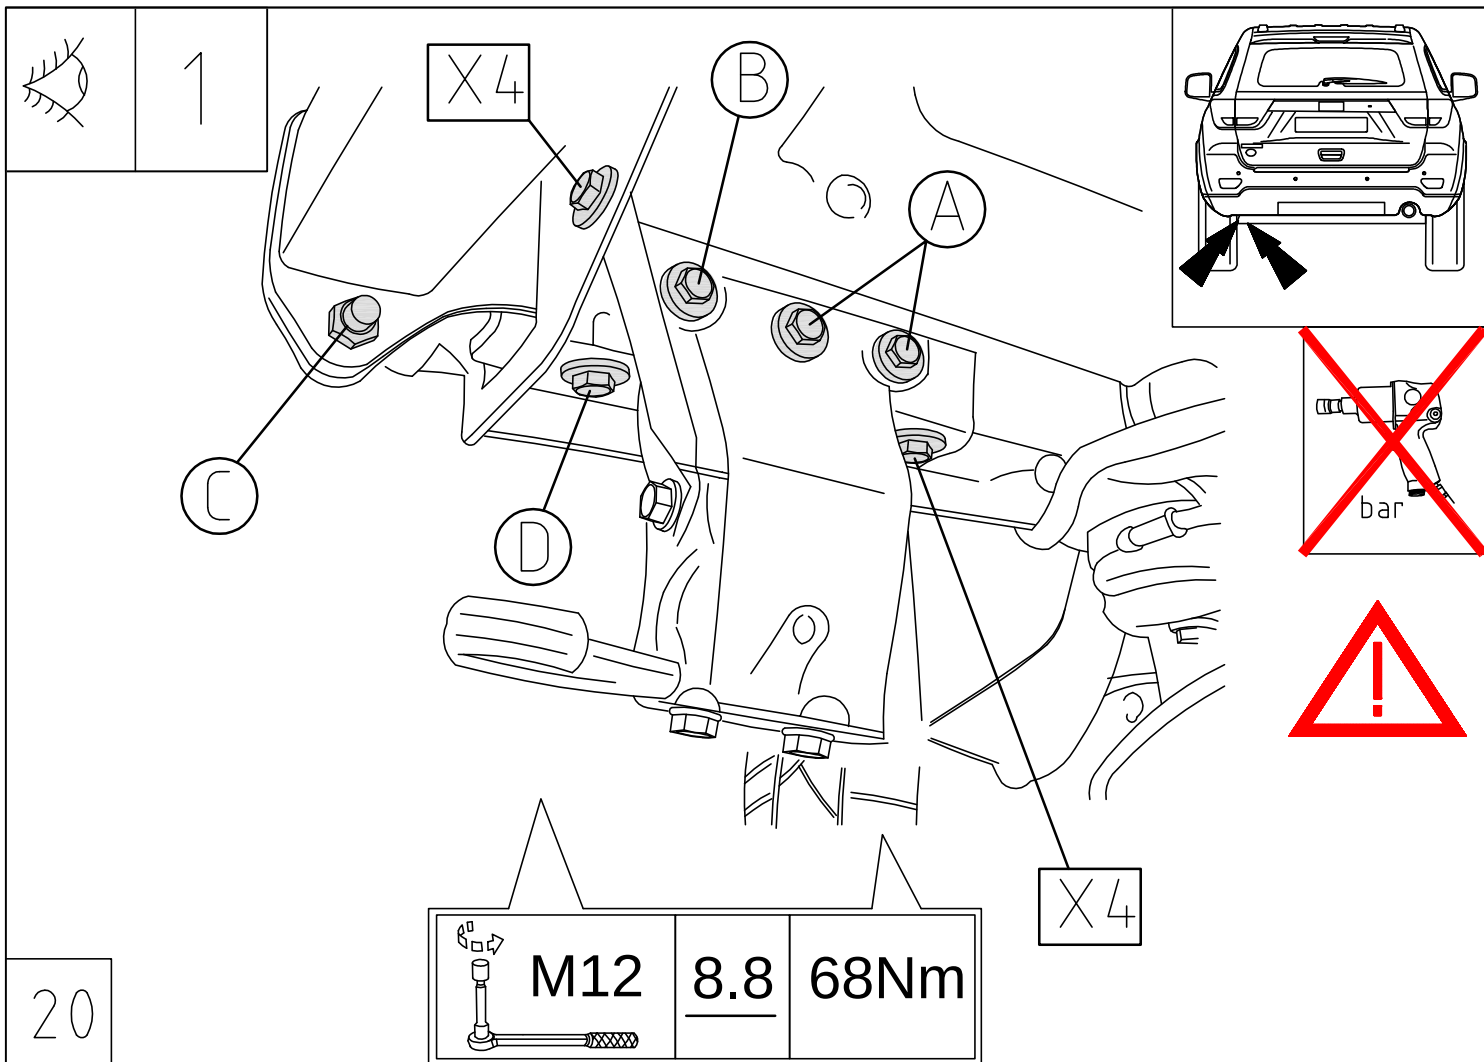

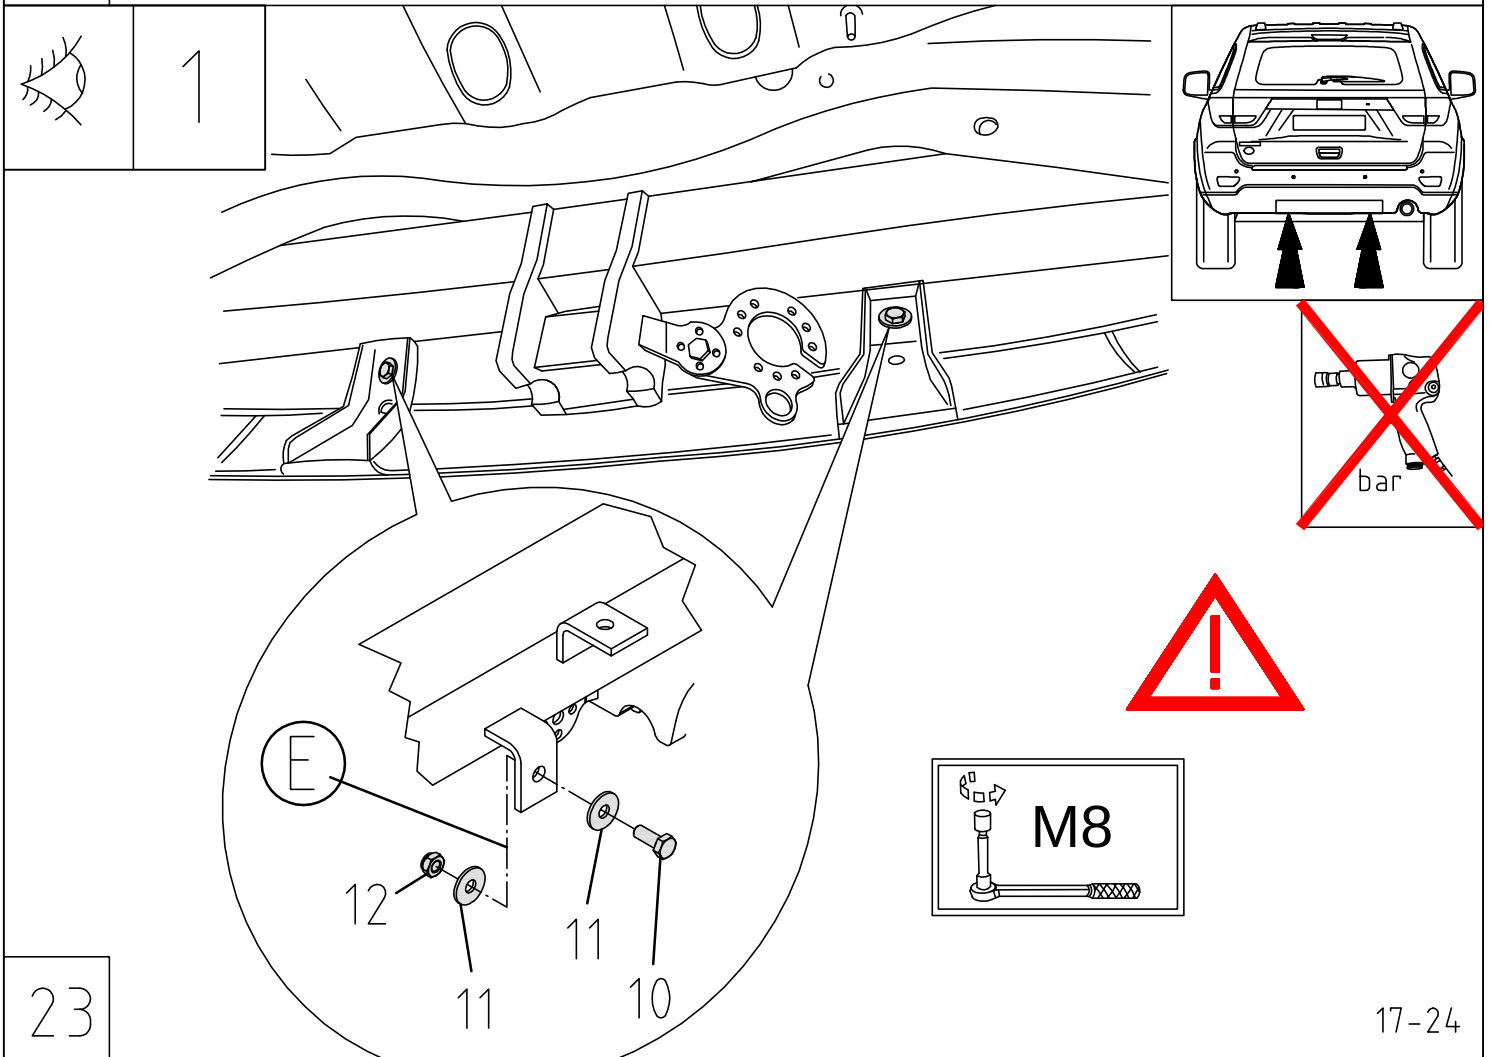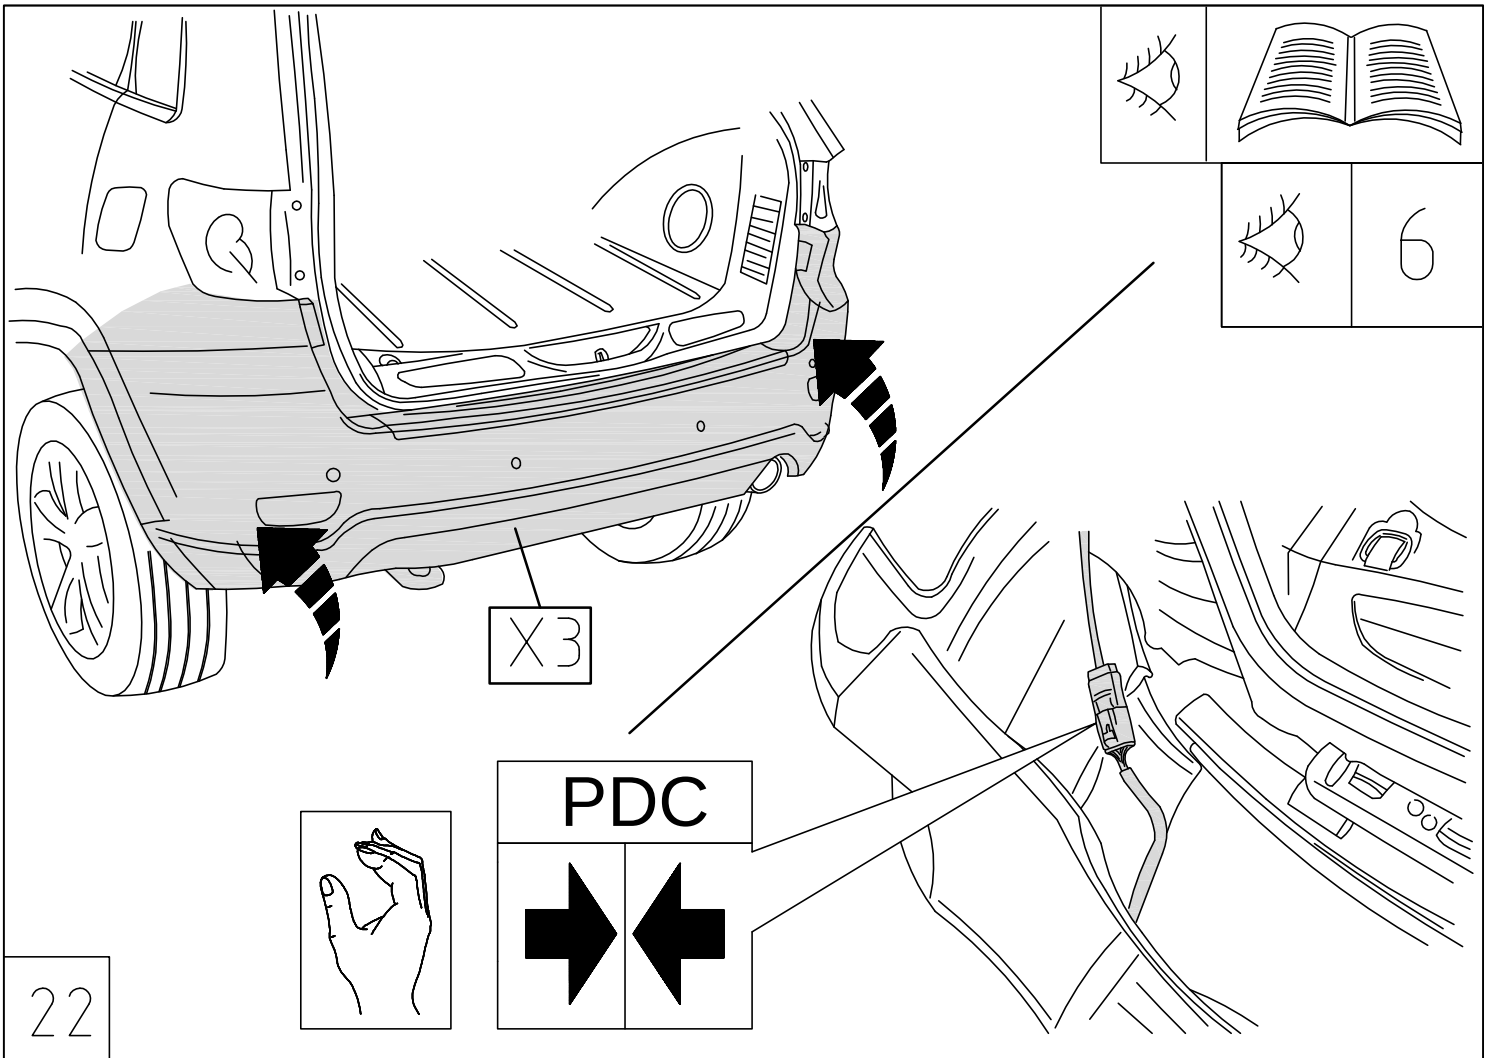







1

SRT



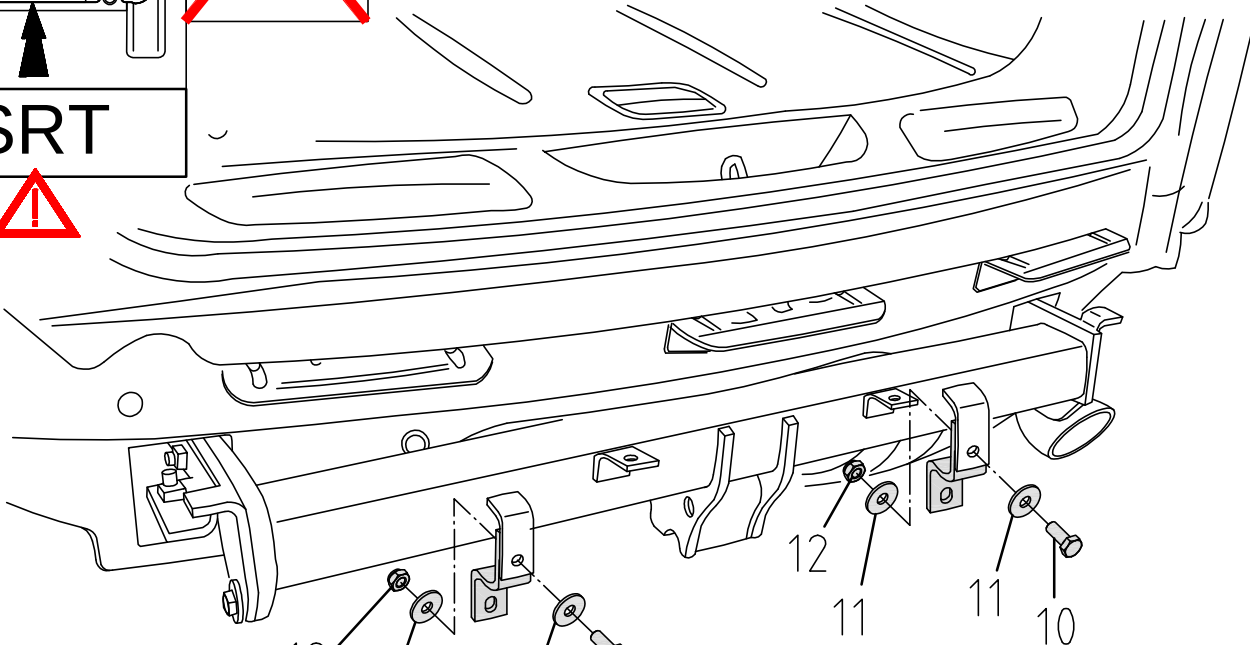





M8

8.8


20Nm

24





PDC



SRT





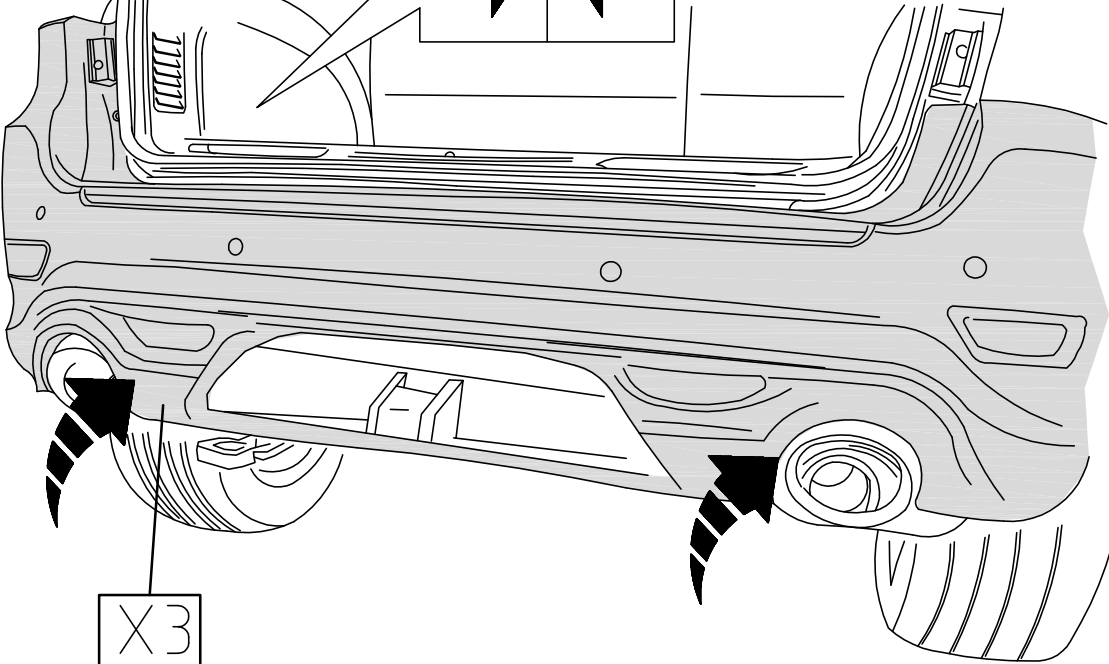


X3

25




18-24

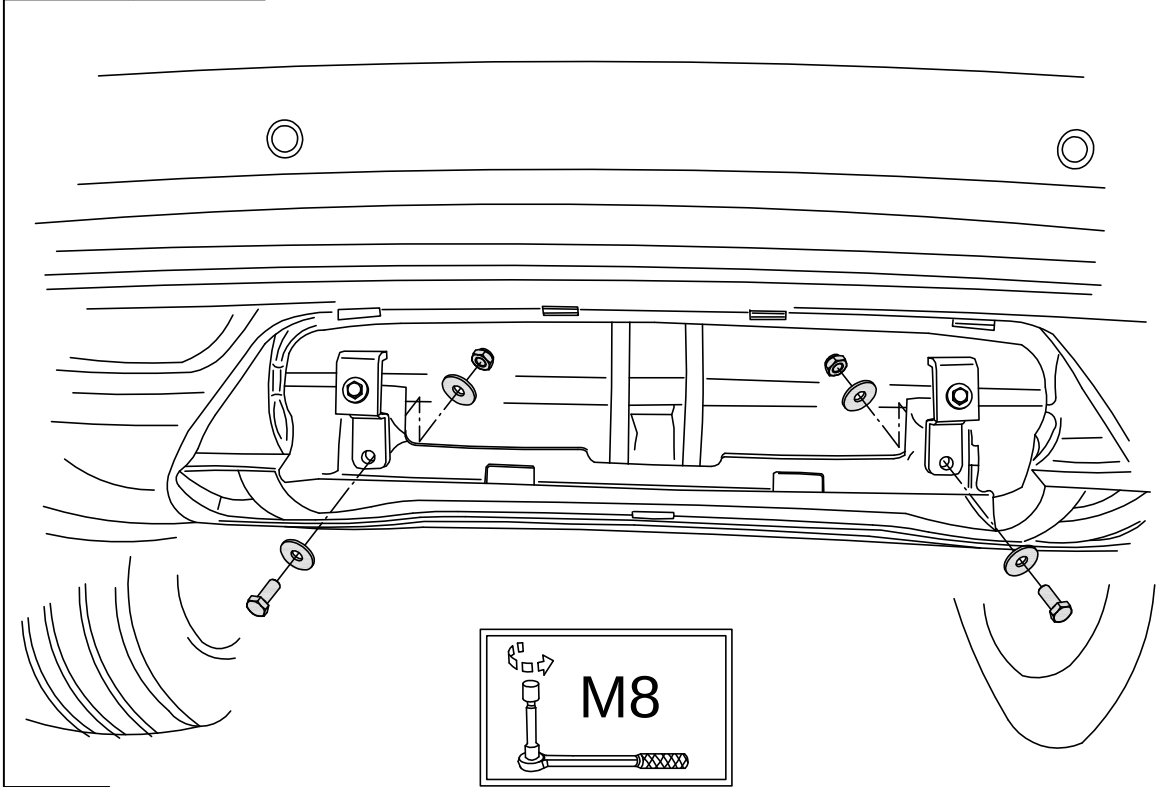


26




SRT

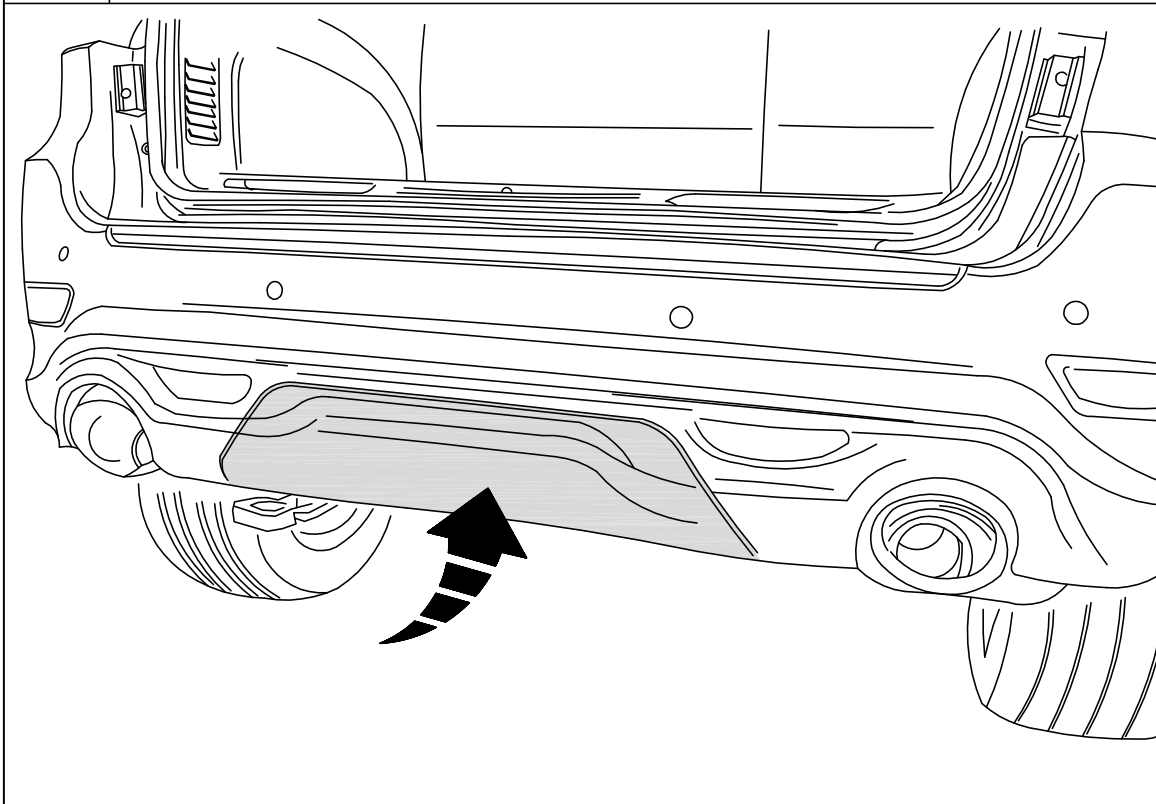

SRT


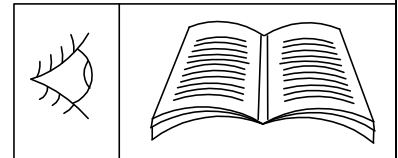


27




28


1.

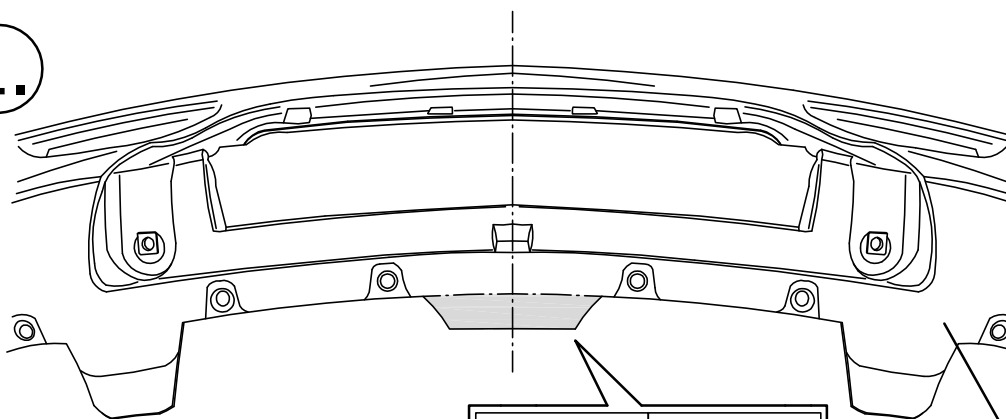



SRT


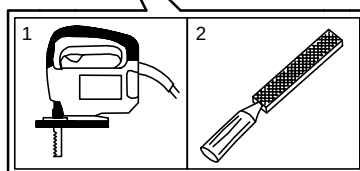




2.


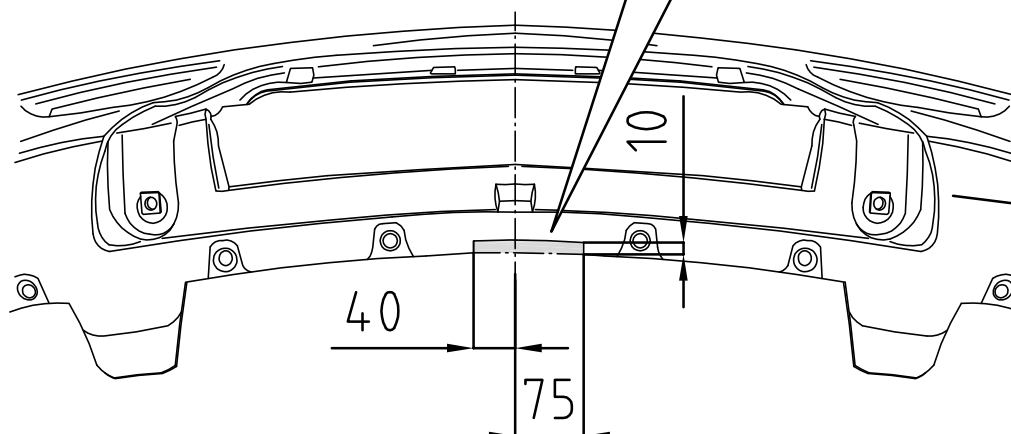


29



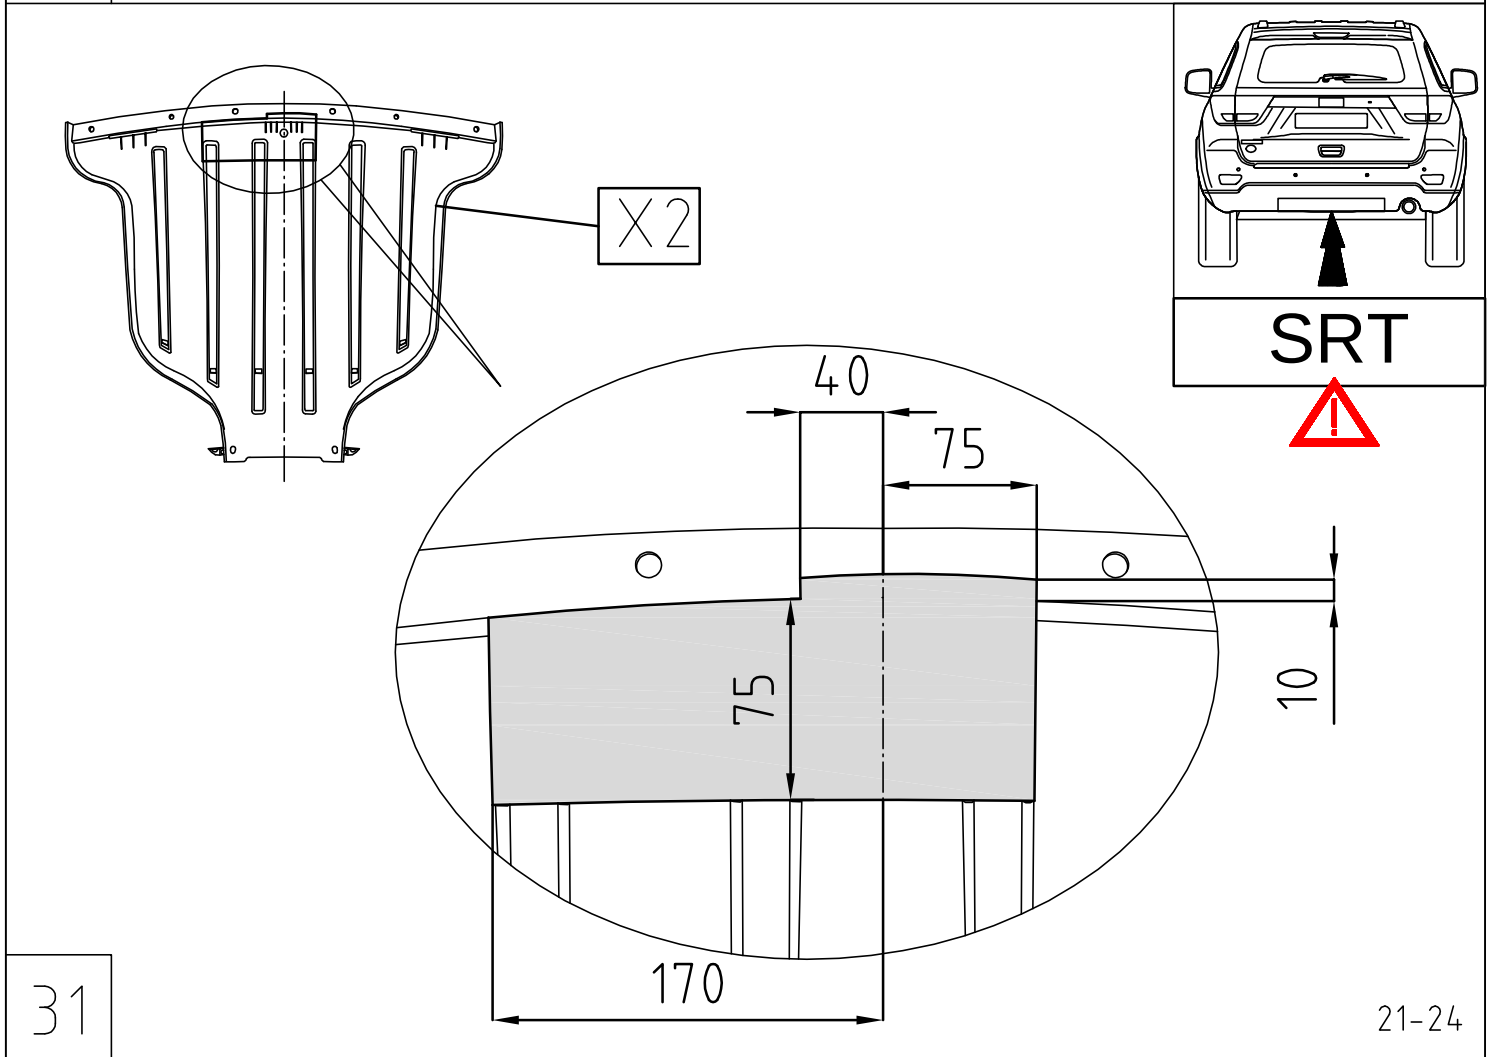
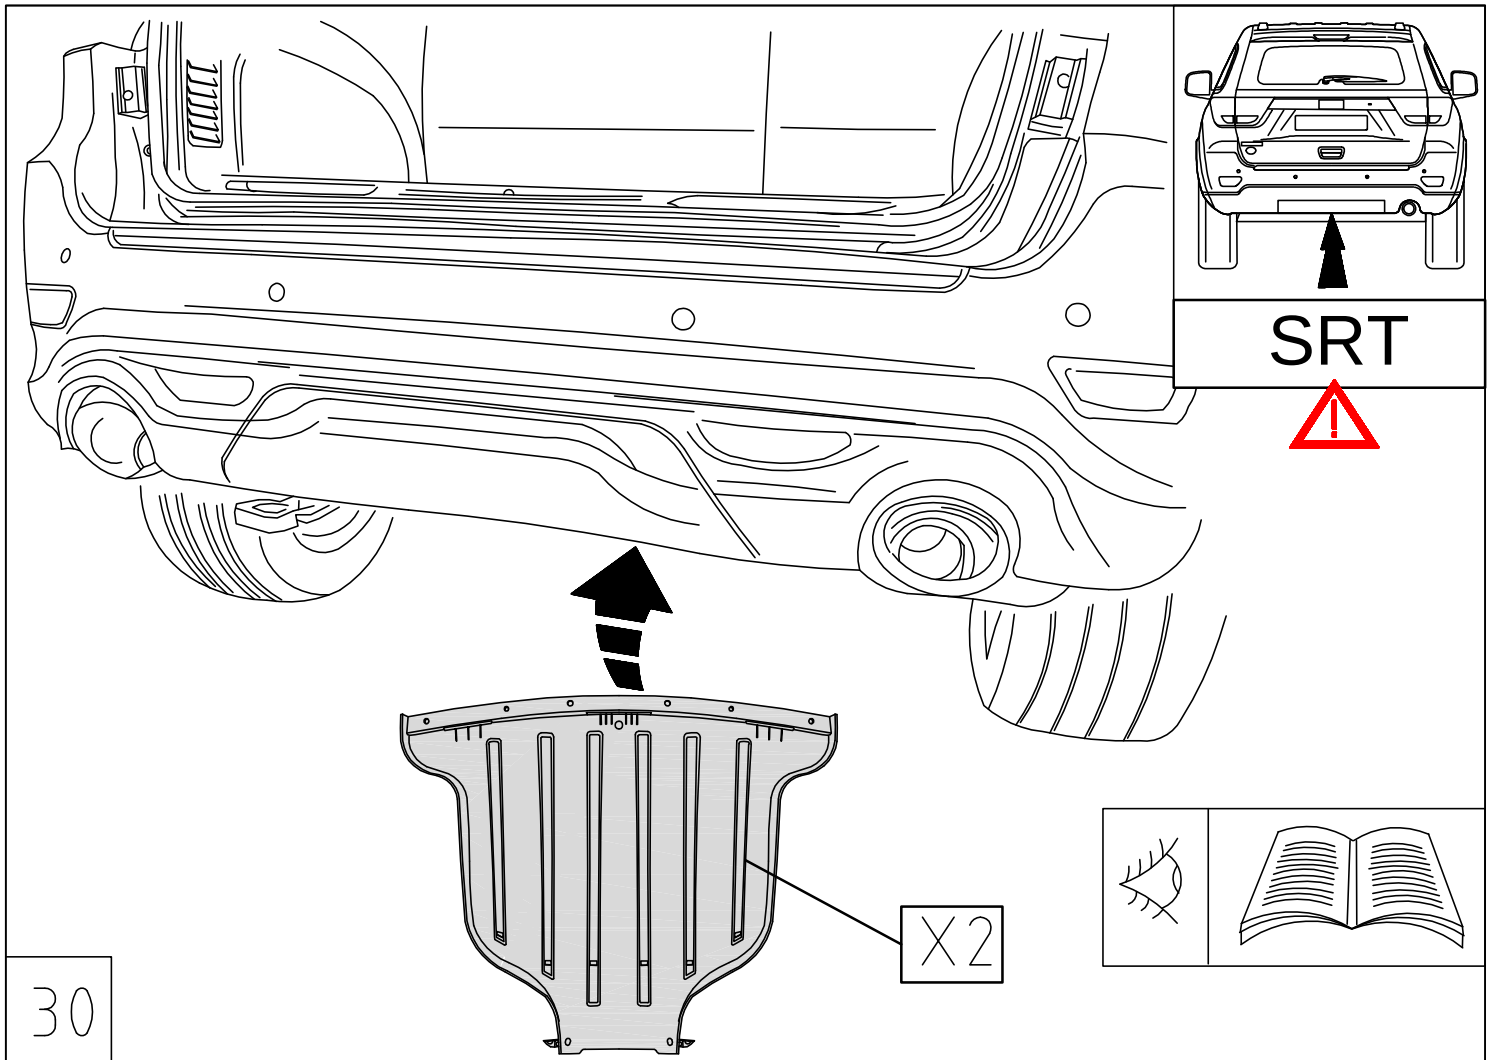


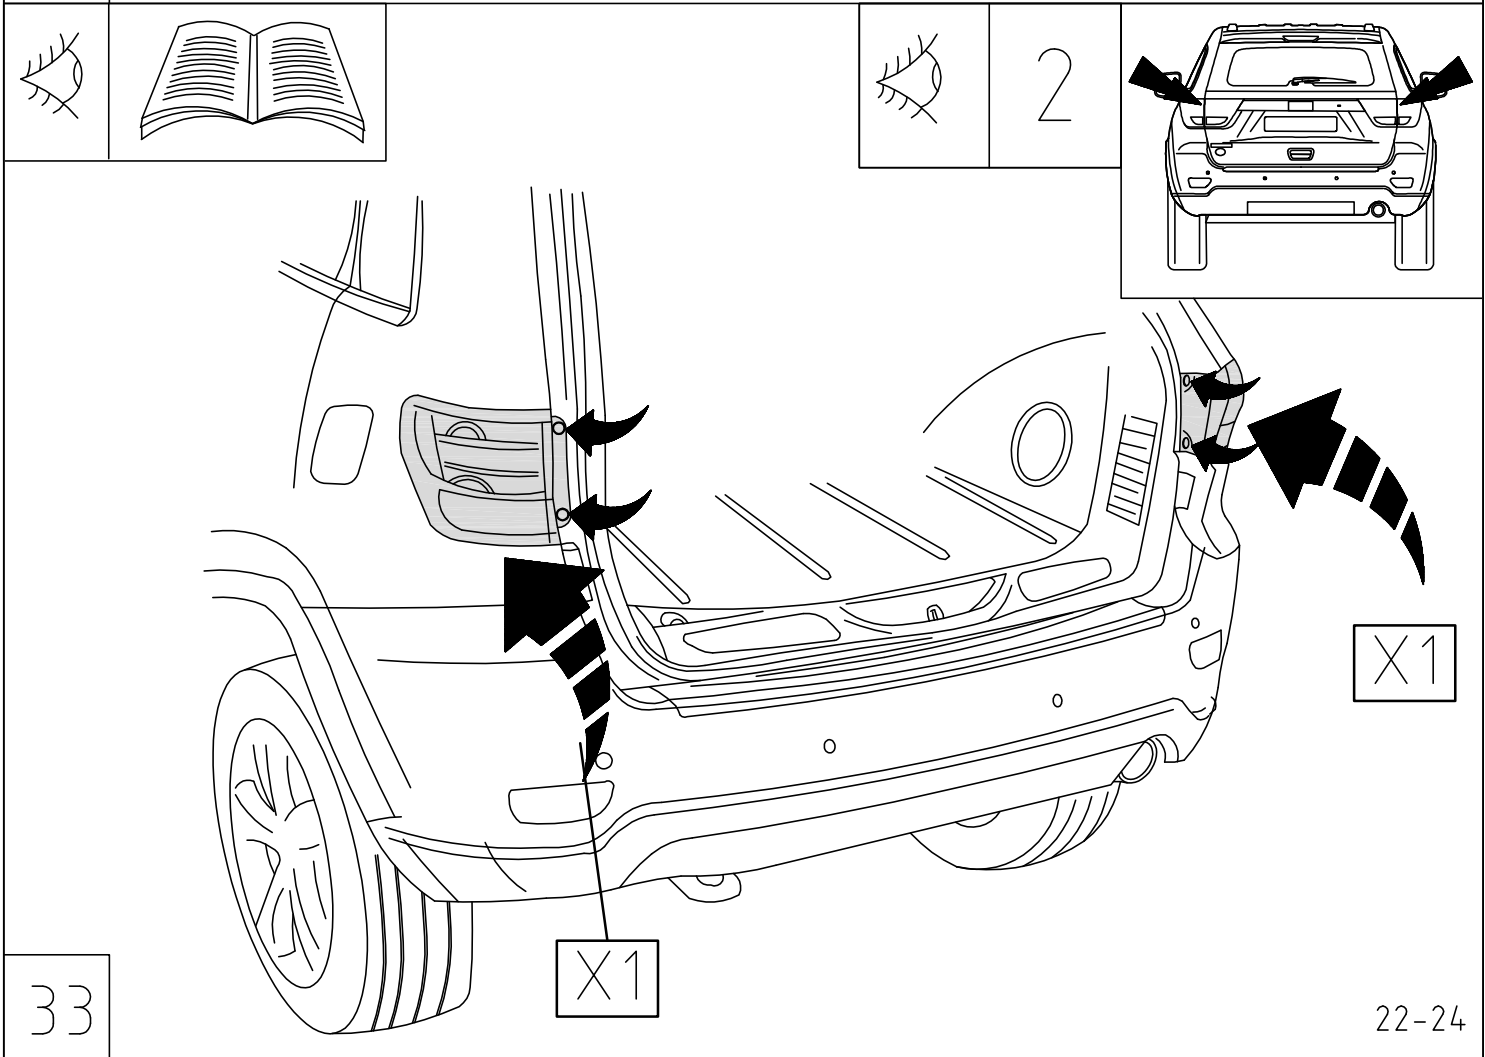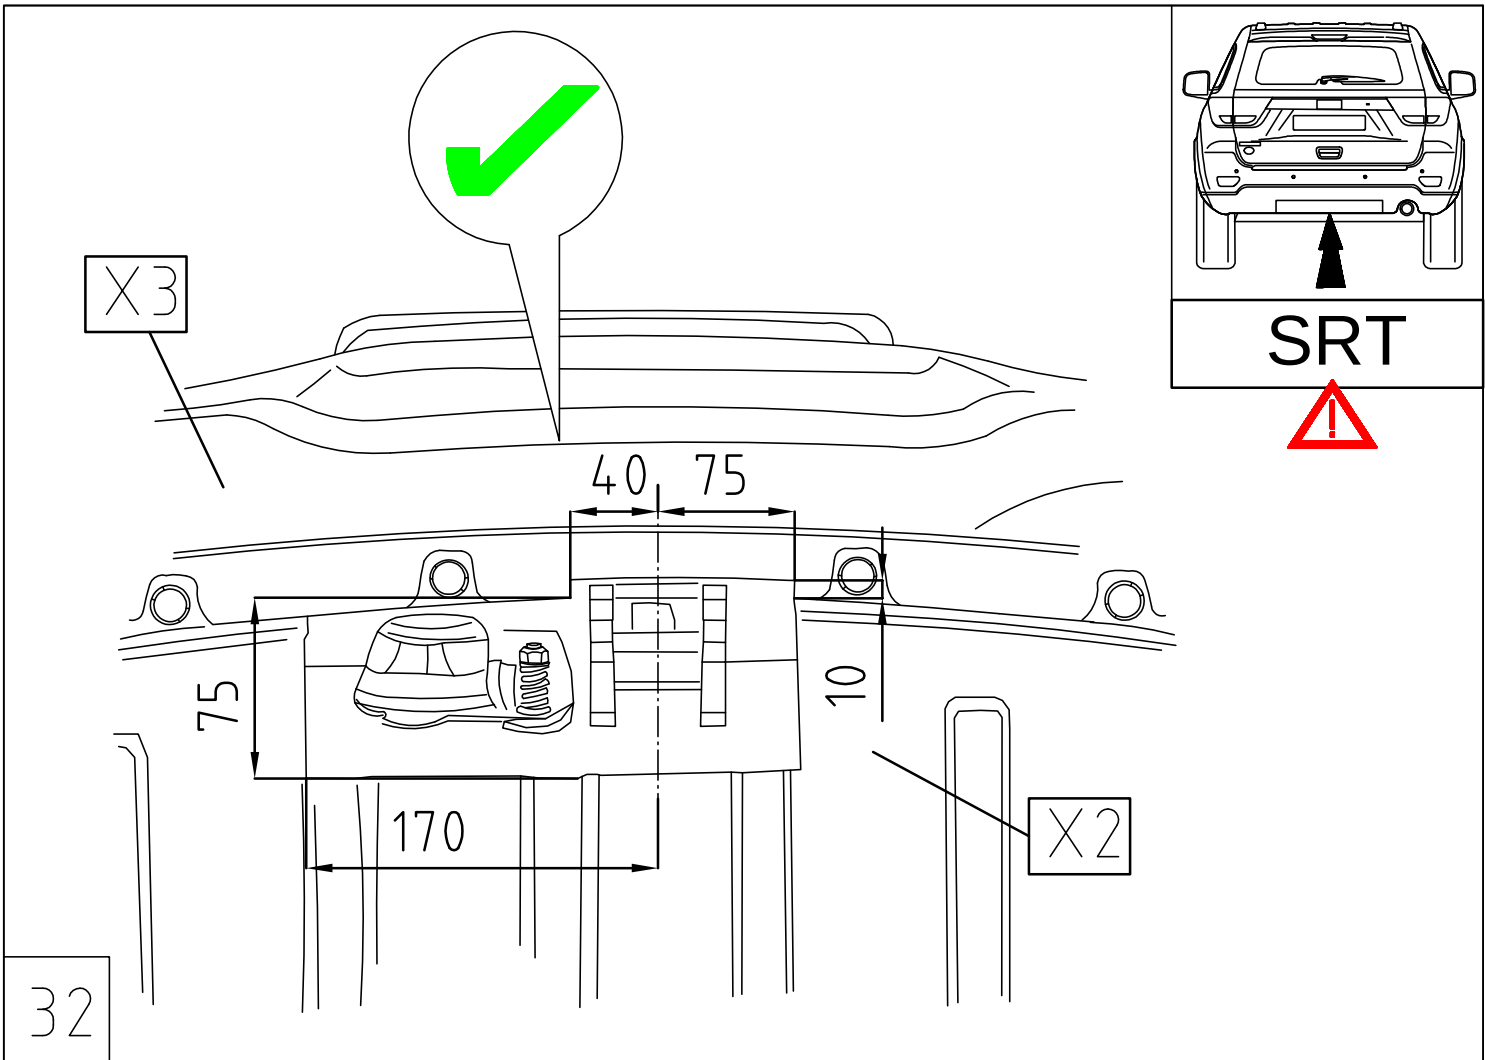

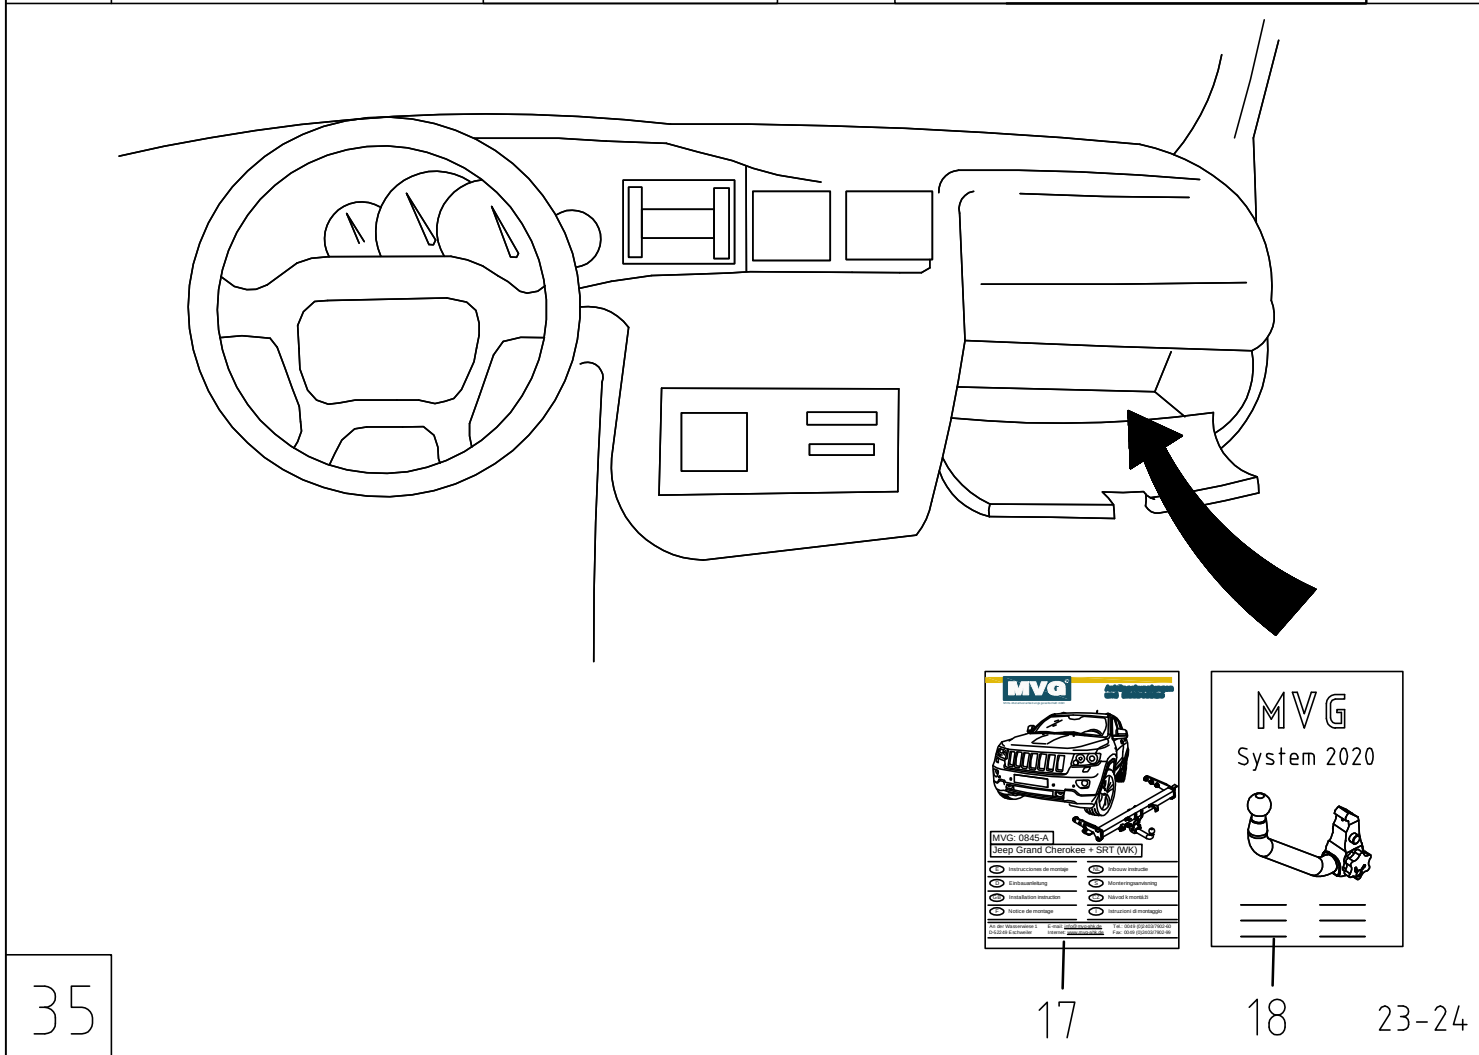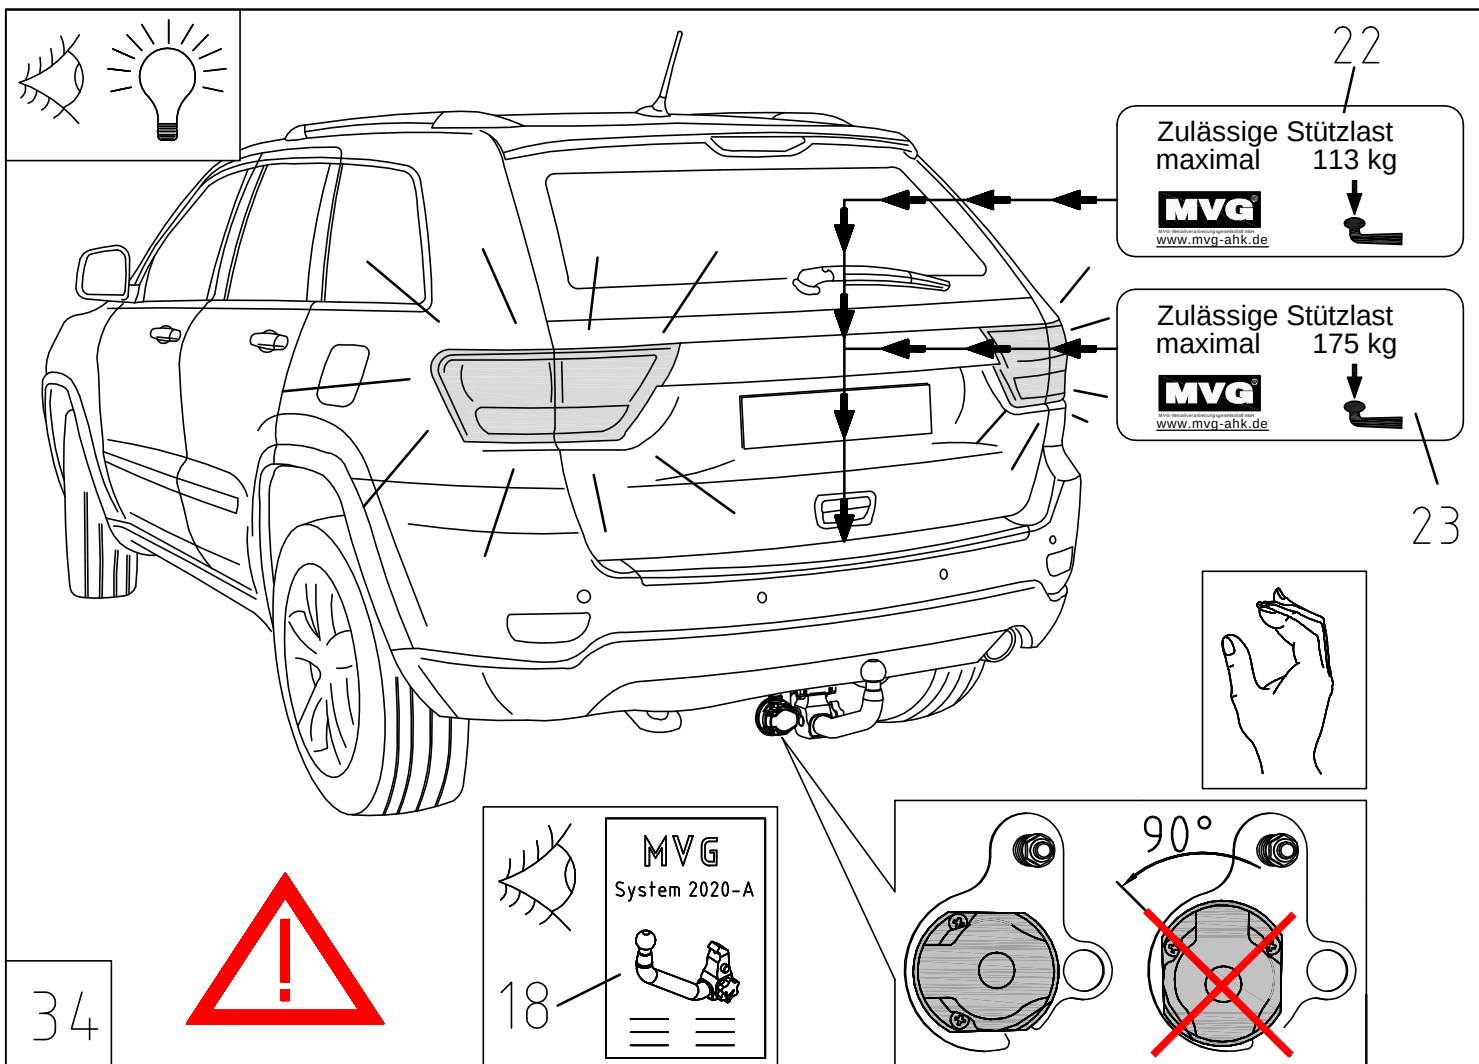



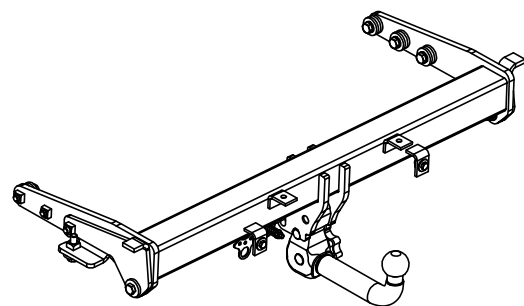
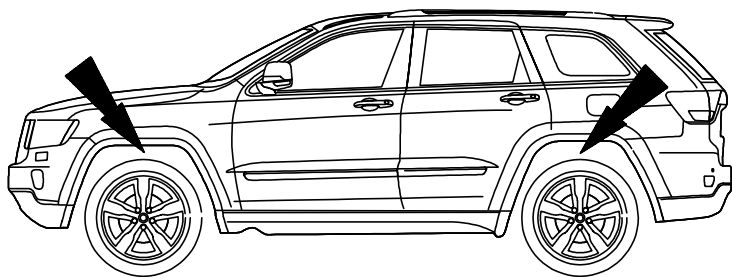


Best. Nr.: 0845 A

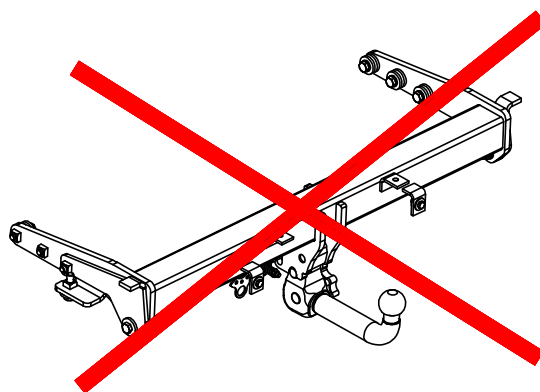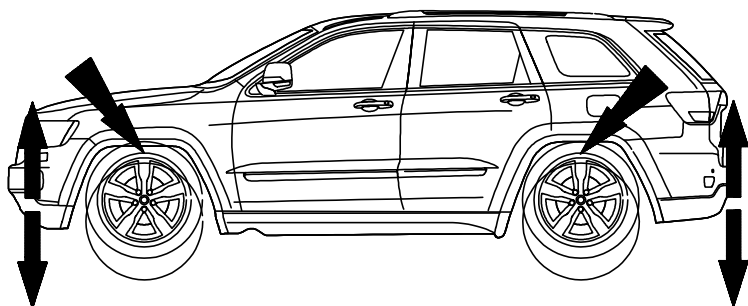

36

Technische Änderungen vorbehalten

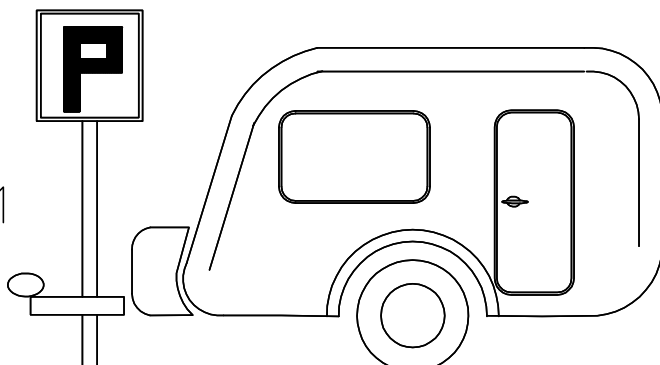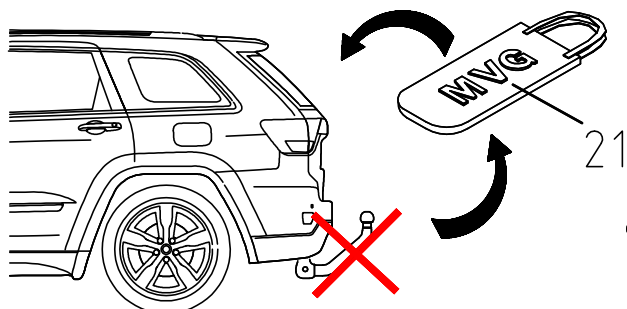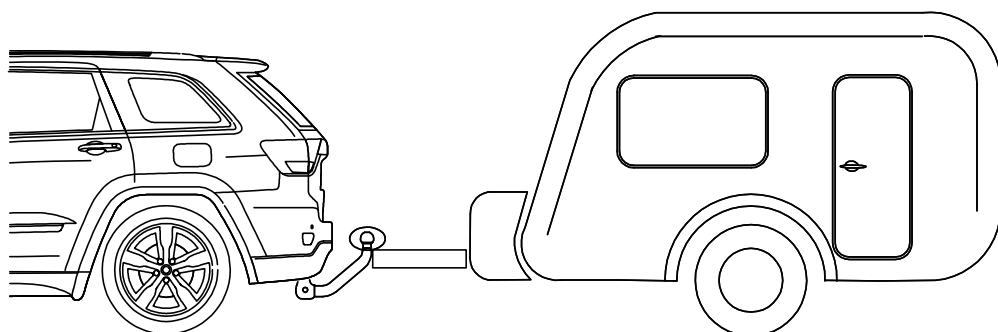

37

24-24