
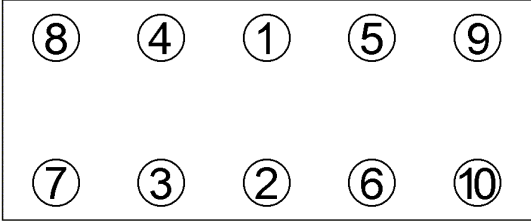


Anziehvorschrift für Zylinderkopf		018.690 passend für / suitable for adaptable à / adaptable a Kia	 Das Original	
Tightening Instructions for Cylinder Head				
Instructions de serrage pour culasse				
Prescripciones de apriete para culatas				
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo				
		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete 		
707.630 M 11 x 107				
Anziehen/ * 30 Nm Tightening/ 60 Nm Serrage/ 76-81 Nm Apriete				
Zeichenerklärung / Explanations / Explication / Explicacion				
*	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
□	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor Ø 79,5 mm Mot.: B5, B6, OK280 1,5 ltr.-1,6 ltr. 59 kW (80 PS) Sephia, Shuma				
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601		*018.690*		