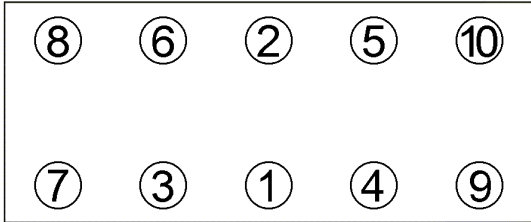


Anziehvorschrift für Zylinderkopf		180.270	 Das Original
Tightening Instructions for Cylinder Head		passend für / suitable for adaptable à / adaptable a Fiat	
Instructions de serrage pour culasse			
Prescripciones de apriete para culatas			
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete	
			
111.580 M 9 x 87 x 1,25			
Anziehen/ Tightening/ Serrage/ Apriete	* ➤ ➤	15 Nm 30 Nm 90° 90°	
Zeichenerklärung / Explanations / Explication / Explicacion			
* ★ □ ● ➤	neue Zylinderkopf- schrauben verwenden Warmlauf (80°C) Schrauben einzeln lösen und wieder anziehen Setzzeit Drehwinkel	use new cylinder head bolts warm up time (80°C) loosen and tighten each bolt relaxation time torque angle	utiliser des vis neuves chauffage (80°C) deserrer et serrer vis par vis durée de tassement angle de serrage emplar tornillos nuevos calentamiento (80°C) aflojar y apretar tornillo a tornillo tiempo de espera ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor			
÷ 1,65 mm, Ø 71,4 mm			
Fiat Punto 1,2 i.e., Lancia Y 1,2 ab 1997> Fiat Brava/o 1,2, Fiat Marea 1,2 ab 1998> Fiat Stilo 1,2 ab 2001>			
Mot. 188A5.000 (> Mot. 616936), 176B9.000,			
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601		*180.270*	