
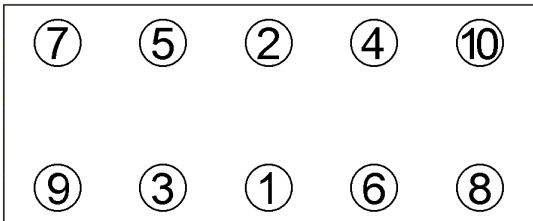


Anziehvorschrift für Zylinderkopf		560.015 passend für / suitable for adaptable à / adaptable a Mitsubishi	 Das Original	
Tightening Instructions for Cylinder Head				
Instructions de serrage pour culasse				
Prescripciones de apriete para culatas				
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete		
 709.170 M 10 x 100				
Anziehen/ Tightening/ Serrage/ Apriete		* 30 - 35 Nm 50 - 55 Nm 70 - 75 Nm ★ 15 min 80 - 85 Nm		
Zeichenerklärung / Explanations / Explication / Explicacion				
★	neue Zylinderkopf- schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
☐	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor				
Ø: 82 mm				
Mot: 4G37, G37B 1,8 ltr.				
Cordia, Galant IV, Lancer III-IV, Space Wagon, Tredia				
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601			*560.015*	