
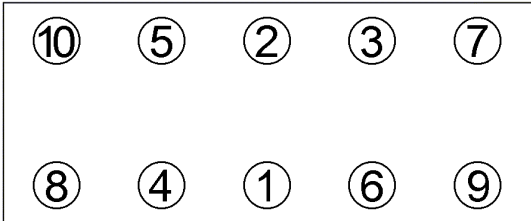


Anziehvorschrift für Zylinderkopf		726.840 passend für / suitable for adaptable à / adaptable a VW	 Das Original	
Tightening Instructions for Cylinder Head				
Instructions de serrage pour culasse				
Prescripciones de apriete para culatas				
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete		
 189.380 M 12x1,75x137				
Anziehen/ Tightening/ Serrage/ Apriete		* 35 Nm 60 Nm ➤ 90° ➤ 90°		
Zeichenerklärung / Explanations / Explication / Explicacion				
✱	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
□	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor				
Ø 82,2 ± 1,63 mm 2 Ltr. Diesel				
62/75/103/132 kW (84/102/140/180 PS)				
Mot. CAAA, CAAB, CAAC, CAAD, CFCA, CDBA, CDCA, CNFA, CNEA, CSHA, CKTB, CKTC, CKUB, CKUC, CPYA,				
Transporter, Campmobil, Amarok, Crafter				
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601			*726.840*	