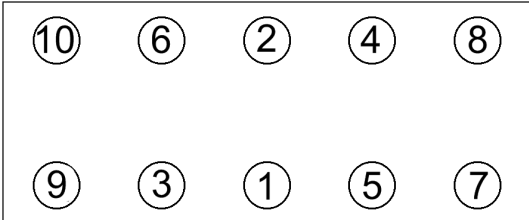


Anziehvorschrift für Zylinderkopf		789.190		
Tightening Instructions for Cylinder Head		passend für / suitable for adaptable à / adaptable a Fiat, Lancia, Alfa Romeo		
Instructions de serrage pour culasse				
Prescripciones de apriete para culatas				
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete		
				
524.160 M 12x1,25x198				
Anziehen/ Tightening/ Serrage/ Apriete	* 20 Nm 63 Nm ➤ 90° ➤ 90° ➤ 90°			
Zeichenerklärung / Explanations / Explication / Explicacion				
*	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
□	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor				
Ø: 80,5 mm $\frac{1}{2}$: 0,92 mm				
Mot: 1,6 ltr. JTD 66-88 kW (90-120 PS)				
Nuovo Bravo, Linea, Grande Punto, Idea, Punto Evo, Nuovo Doblo, Mito, Giulietta, Musa, Nuovo Delta				
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601		*789.190*		