
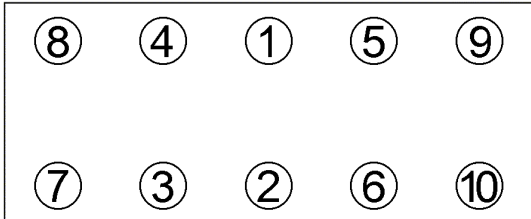


Anziehvorschrift für Zylinderkopf		964.210 passend für / suitable for adaptable à / adaptable a Renault, Opel	 Das Original
Tightening Instructions for Cylinder Head			
Instructions de serrage pour culasse			
Prescripciones de apriete para culatas			
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete	
 373.320 M 12x1,5x131			
Anziehen/ Tightening/ Serrage/ Apriete		* 15 Nm 30 Nm ➤ 300°	
Zeichenerklärung / Explanations / Explication / Explicacion			
* ★ ☐ ● ➤	neue Zylinderkopf- schrauben verwenden Warmlauf (80°C) Schrauben einzeln lösen und wieder anziehen Setzzeit Drehwinkel	use new cylinder head bolts warm up time (80°C) loosen and tighten each bolt relaxation time torque angle	utiliser des vis neuves chauffage (80°C) deserrer et serrer vis par vis durée de tassement angle de serrage emplar tornillos nuevos calentamiento (80°C) aflojar y apretar tornillo a tornillo tiempo de espera ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor			
Ø: 90 mm; $\frac{1}{2}$: 1,50 mm			
Mot: G9U 720, 724, 730, 750, 754 2.5 Ltr. dCi/DTI Diesel 73-99 kW (99-135 PS)			
Master, Trafic, Movano		ab 2001➔	
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601		*964.210*	